



# ANKA / ANKA PLUS

## CCT Up/Down Wall Light

WALL LIGHT



90mm - 22555

108mm - 22561

TRI-COLOUR CCT

**3000K - 6000K**  
WARM WHITE TO DAYLIGHT

**3YR**  
WARRANTY

**18W**  
LED

**1500**  
LUMENS

**24W**  
LED

**2400**  
LUMENS

**220-240V**  
AC

**CCT**  
COLOUR  
CHANGING  
TEMPERATURE

**IP65**  
WEATHER  
RESISTANT

22555

22561

The Anka and Anka Plus CCT Up/Down Wall Lights are modern wall lights made from industrial strength aluminium giving your house a fresh new look.

- Premium modern cylinder shape surface fixed up/down wall light.
- Integrated Bridgelux® LED light source  
*Bridgelux is a registered trademark of Bridgelux Inc.*
- 60° beam angle.
- Industrial strength aluminium housing.
- Durable matt black powder coating.
- Dual cable entry and large terminal block for easy connection.
- Crystal clear tempered glass lens allows a crisp clean light.

### APPLICATIONS

- Accent light perfect for illuminating pillars, side of doors, windows, steps or paths, garages and more.
- Suitable for residential and commercial applications.

22555/06 22561/06: BLACK



22555/05 22561/05: WHITE





# ANKA / ANKA PLUS

## CCT Up/Down Wall Light


WALL LIGHT

### TECHNICAL SPECIFICATIONS

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| Operating Voltage        | 220-240V / 50Hz                                                 |
| Class                    | Class I (1)                                                     |
| Wattage (22555)          | 18W                                                             |
| Wattage (22561)          | 24W                                                             |
| Light source:            | Integrated Bridgelux Cob                                        |
| Colour Temperature       | 3000°K (Warm white)<br>4500°K (Cool White)<br>6000°K (Daylight) |
| Power/Lumens/CCT (22555) | 18W 1400lm 3000°K<br>18W 1500lm 4500°K<br>18W 1500lm 6000°K     |
| Power/Lumens/CCT (22561) | 24W 2200lm 3000°K<br>24W 2400lm 4500°K<br>24W 2400lm 6000°K     |
| Beam Angle               | 60 degrees                                                      |
| Colour Rendering Index   | ≥85                                                             |
| Power Factor             | ≥0.9                                                            |
| Dimmable                 | No                                                              |
| Construction             | Housing: Aluminium<br>Diffuser: Clear Tempered Glass            |
| Ingress protection       | IP65 weather resistant                                          |
| Warranty                 | 3 year replacement                                              |
| Standards                | AS/NZS 60598.1<br>AS/NZS 60598.2.1                              |

### INSTALLATION

Must be installed by a Licensed Electrician

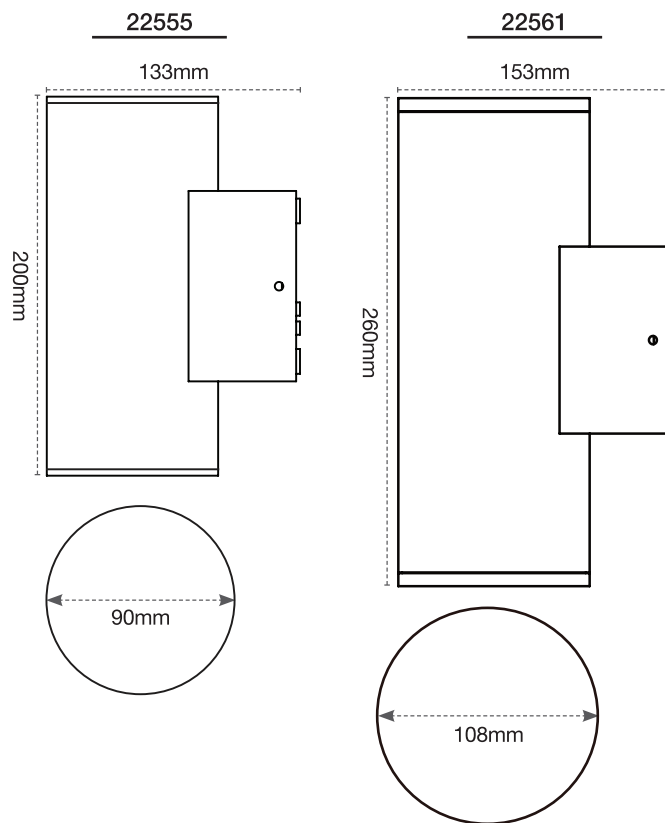

|            | COLOUR      | DESCRIPTION                         | BOX SIZE              | GROSS WEIGHT | BOX QTY |
|------------|-------------|-------------------------------------|-----------------------|--------------|---------|
| 22555      |             |                                     |                       |              |         |
| RETAIL BOX | Black/White | ANKA<br>CCT Up/Down Wall Light      | W140 x H210 x D95 mm  | 0.97 kg      | 1 pc    |
| OUTER CTN  | Black/White | ANKA<br>CCT Up/Down Wall Light      | W400 x H220 x D300 mm | 8.3 kg       | 8 pc    |
| 22561      |             |                                     |                       |              |         |
| RETAIL BOX | Black/White | ANKA PLUS<br>CCT Up/Down Wall Light | W160 x H270 x D115 mm | 1.37 kg      | 1 pc    |
| OUTER CTN  | Black/White | ANKA PLUS<br>CCT Up/Down Wall Light | W480 x H280 x D350 mm | 11.50 kg     | 8 pc    |