



### CHAM-REM-2C

#### Specifications

Output:	2.4G Mesh Signal	Operation Frequency:	2.4GHz	Power Supply:	4.5V (2x AAA Battery)
Operating Temp:	0-40°C	Relative Humidity:	8% to 80%	CCT:	Tuneable White
IP Rating:	IP20				

#### Safety & Warning:

- This Device contains AAA batteries that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

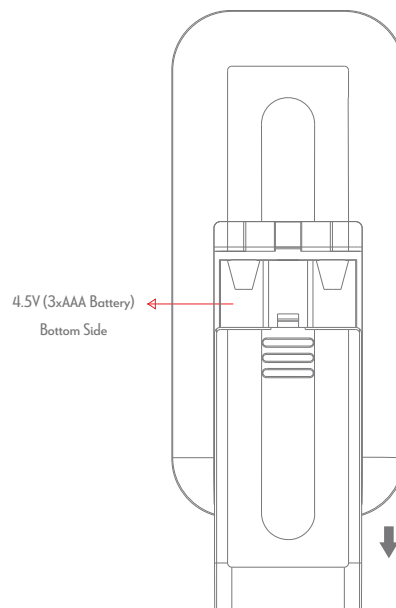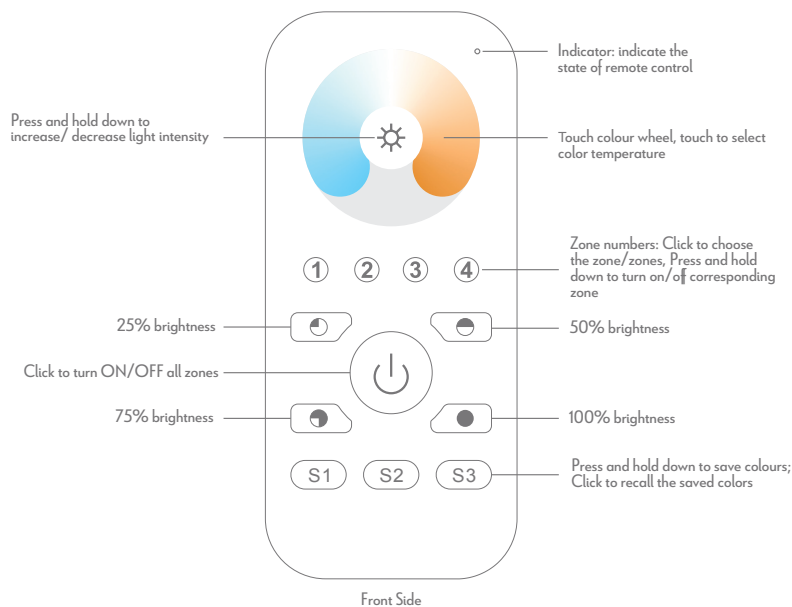


**Note:** -The lamp must be installed by professional electrician  
 -Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
 -Keep away from hot steam and corrosive gas

## Pair with 2.4G Mesh Receiver

**Step 1:** Do wiring the receiver according to wiring diagram (please refer to the instruction of 2.4G mesh receiver that you would like to pair with).

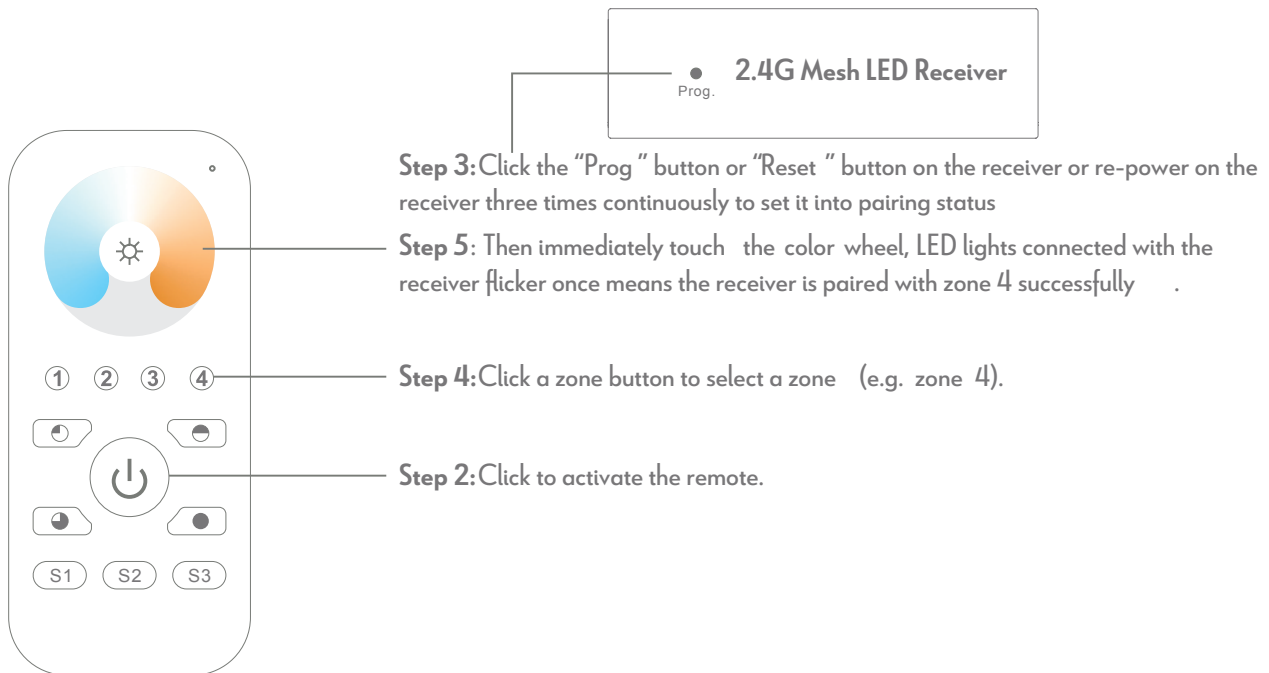

If you use multiple receivers you have 2 choices:


Option 1: Have all the receivers in the same zone, like zone 1.



Option 2: Have each receiver in a different zone, like zone 1, 2, 3 or 4



## Save colour/scene/mode

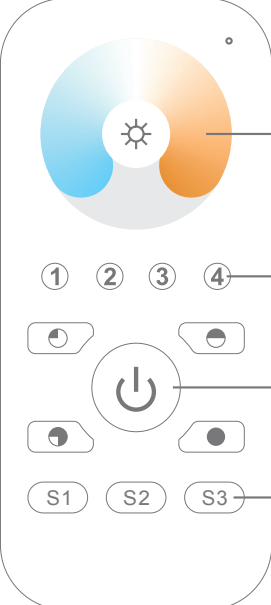

The diagram shows a remote control with the following components: a color wheel at the top with a sun icon in the center; four numbered buttons (1, 2, 3, 4) below it; a power button in the center; four directional buttons (up, down, left, right) around the power button; and three scene buttons labeled S1, S2, and S3 at the bottom.


**Step 3:** Touch the color wheel or click the other buttons to select the scene you like

**Step 2:** Choose and click one or multiple paired zone numbers (e.g. zone 4)

**Step 1:** Click ON/OFF button to activate the remote

**Step 4:** Press and hold any scene buttons of S1-S3 (e.g. S3), LED lights connected with the RF receiver flicker once means the color/scene was saved successfully

## Recall the saved colours/scenes

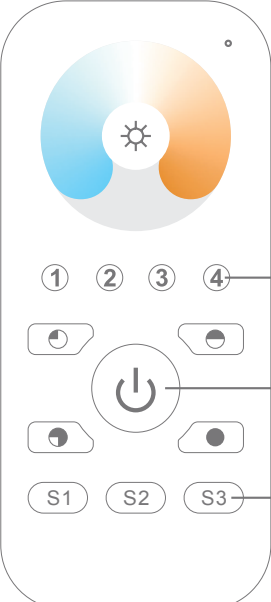

The diagram shows a remote control with the same components as in the previous section.

**Step 2:** Choose and click one or multiple paired zone numbers (e.g. zone 4)

**Step 1:** Click ON/OFF button to activate the remote

**Step 3:** Click any scene buttons of S1-S3 (e.g. S3) to recall the saved scene