



ECO LED

CCT Dimmable Downlights

DOWNLIGHT



Flush - 22828/05



Recessed - 22886/05



TRI-COLOUR CCT

3000K - 5000K
WARM WHITE TO DAYLIGHT

3YR
WARRANTY

220-240V
AC

8W
800lm
Max.

100°
BEAM
ANGLE

IP44
RATED
(Front Only)

DIMMABLE

IC-F
ABUTTED &
COVERED

IC-4


90mm

The ideal downlight for new or existing downlight installs. Its fixed design provides a wide angled diffused beam. Change the colour temperature from warm white to cool white or daylight, using the switch located on the back of the unit.

- Fixed head, flush or recessed fascia downlight that seamlessly integrates with ceiling.
- 0.6m Flex & plug.
- Delivers a high level of lumens with a lower wattage output.
- Perfect for new or retro-fit installations with a standard 90mm hole cut-out.
- Easily change colour temperature (CCT) from warm white 3000K, cool white 4000K to daylight 5000K using the switch located on the back of the unit.
- IC-F and IC-4 rated - Can be safely covered and abutted to building insulation.
- IP44 rated (front fascia only).
- SAA approved with integrated dimmable driver.

APPLICATIONS

- Ideal for any residential or commercial interior space.





ECO LED

CCT Dimmable Downlights



DOWNLIGHT

TECHNICAL SPECIFICATIONS

Operating Voltage	220-240V / 50Hz
Class	Class II (2)
Wattage	8W Total
Workign Temperature Range	0-40°C
Lumens	650 Total lumens (3000K) 800 Total lumens (4000K) 720 Total lumens (5000K)
Colour Temperature	3000°K (Warm white) 4000°K (Cool White) 5000°K (Daylight)
Beam Angle	100 degrees
Colour Rendering Index	≥80
Ingress Protection	IP44 (front only)
Power Factor	≥0.9
Dimmable	Yes
IC-4 Rated	TA 25°C
Rated Lifetime	60,000 hrs, reported TM-21, L70(10k)
Construction	Polyamide, alumimium and PC diffuser
Warranty	3 year replacement
Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15

INSTALLATION

Must be installed by a Licensed Electrician

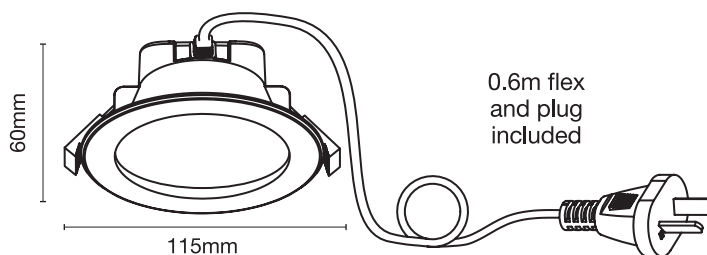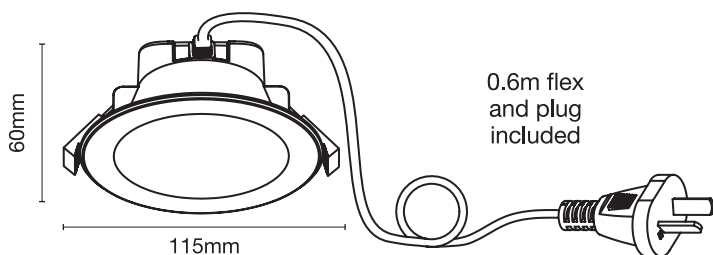

	COLOUR	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY
22828/05					
RETAIL BOX	White	Eco LED CCT Downlight (Flush)	W120 x H75 x D120 mm	0.2 kg	1 pc
OUTER CTN	White	Eco LED CCT Downlight (Flush)	W380 x H310 x D500 mm	10.1 kg	48 pc
22886/05					
RETAIL BOX	White	Eco LED CCT Downlight (Recessed)	W120 x H75 x D120 mm	0.2 kg	1 pc
OUTER CTN	White	Eco LED CCT Downlight (Recessed)	W380 x H310 x D500 mm	10.1 kg	48 pc