


MANROSE®

FULLY ADJUSTABLE FAN RUN-ON TIMER



- Run-on timer adjustable 0 sec to 20 mins
- Delay start adjustable 0 sec to 5 mins
- Easy to install. Designed to fit in a wall mounted flush box or alternatively, within the fan-light assembly
- Suitable for bathroom, toilet & laundry applications

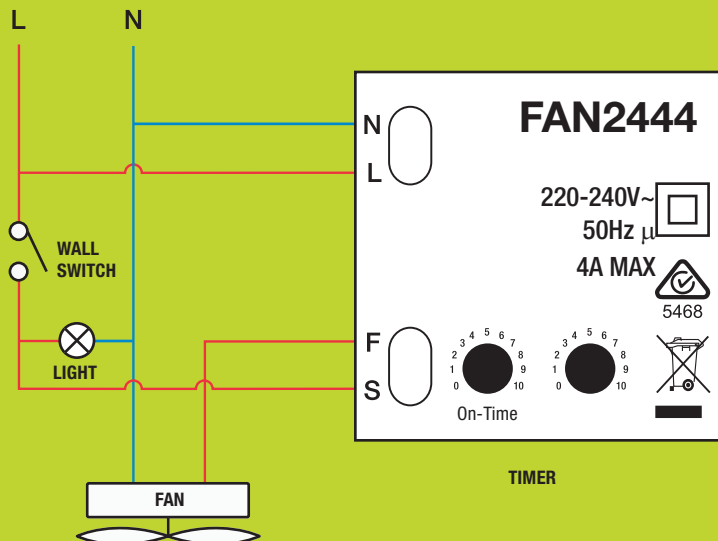

Important

All installations must comply with the current electrical and building regulations required by your local authority, and must be carried out by a registered electrician.

Settings

Select the desired fan **START DELAY** time you want by using the **Off-Time** potentiometer.

Select the desired fan **RUN-ON** time you want by using the **On-Time** potentiometer.

Ensure the wall switch is open for 5 seconds after power is applied.

Potentiometer Value	On-Time (Run-on)	Off-Time (Delay Start)
0	0 secs	0 secs
1	2 mins	30 secs
2	4 mins	1 min
3	6 mins	1.5 mins
4	8 mins	2 mins
5	10 mins	2.5 mins
6	12 mins	3 mins
7	14 mins	3.5 mins
8	16 mins	4 mins
9	18 mins	4.5 mins
10	20 mins	5 mins

Tips

When the fan is powered on, an LED between the dials will flash according to the setting of the On-Time knob, then the Off-Time knob: An initial 1 second long flash will be followed by a number of short 1/4 second flashes corresponding to the dial values.

The timer is in test mode for the first 5 minutes after being powered on. In test mode, the LED will light up then flash according to the setting of the knob when changed.

WARNING: Treat the product as live and dangerous when power is connected. Only connect power to the product when it has been safely sealed away inside a flush box or terminal box.

The **Delay Start** and **Run-On** timer features provide full control of the fan's running time, to help ensure all stale air is cleared from the room.

FAN2444

2YEAR
WARRANTY