


4. Enter your WiFi password.

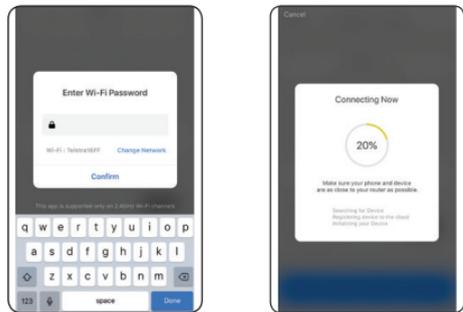


Connection will now begin.

5. Once connected you'll get a menu 'Adding device succeeded'.

Select the room device and press 'Done'.

You can click on the pen to change the device name.

6. The smart device can now be controlled by the BrilliantSmart app.

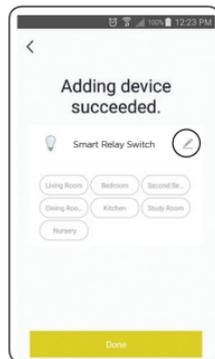

Go to www.brilliantsmart.com.au for full instructions and features.

Warning

1. To prevent injury, this apparatus must be separately attached to the wall in accordance with the installation instructions.
2. Do not open or tamper with smart WiFi relay switch. Injury may occur.
3. Indoor use only. Please use the smart WiFi relay switch in a dry place.
4. Please ensure the smart WiFi relay switch is not overloaded. Working power cannot be higher than the rated power (2400W).
5. If the smart WiFi relay switch is used to operate appliances intended for supervised use (eg heater), ensure the appliance operations are followed as to its instructions. Do not allow any cables, furnishings, flammable materials or other items to come in contact with any surface of a heater.

BrilliantSmart app screens may differ due to application updates & improvements.

Disposal

Please dispose of this packaging and product thoughtfully once it has passed its useful life. When your smart device comes to the end of its life or you choose to update or upgrade it, please do not dispose of it with your normal household waste. Please recycle where facilities exist.

When disposing of this fitting, check with your local authority for suitable options.

Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 12 months from date of purchase. Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, or incorrect installation.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 12 months of the date of purchase of the product.

Refer to our website brilliantlighting.com.au for terms and conditions and warranty claims.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.
ABN 37 006 203 694
956 Stud Road Rowville, VIC 3178
Phone: 03 9765 2555

Email: warranty@brilliantlighting.com.au

MADE IN CHINA

Troubleshooting

Problem: Smart device does not switch ON	
Possible Cause	Suggested Solution
No Mains Power	Check connections, fuses and switches
Problem: Cannot link smart device with BrilliantSmart app	
Possible Cause	Suggested Solution
1. Modem signal weak	Place device and modem closer together
2. Router/modem/smart phone firewall is enabled	Disable firewalls on all devices
3. Internet connection is down	Contact your provider
4. BrilliantSmart app not installed correctly	Remove app and re-install

For any other problems connecting your smart device to BrilliantSmart app please visit: www.brilliantsmart.com.au/faqs

Brilliant Lighting

956 Stud Road
Rowville Vic 3178 Australia
www.brilliantlighting.com.au

Australian Sales

T 03 9765 2555
T 1800 817 754 (interstate only)
F 03 9763 0277
E warranty@brilliantlighting.com.au

New Zealand Sales

T 09 974 9618
E sales@brilliantlighting.co.nz



Fox WiFi Relay Switch Connector 20694/05



Voice control



NO HUB REQUIRED




Works with IFTTT

USER MANUAL

Box content

Fox WiFi Relay Switch x 1
User Manual x 1

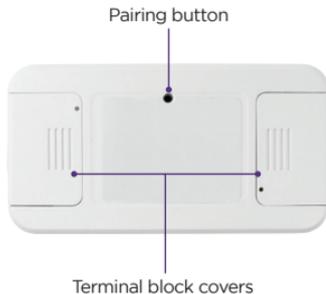

Technical Specifications

Model Number: 20694/05
Supply voltage: 240VAC
Max Load: 2400W Resistive, 500W LED
Dimensions: 95(L)*50(W)*28(H)mm
IP Rating: IP20
Insulation rating: Class I
TA: 10°C...+30°C
Warranty: 1 year
Security: Mac Encryption; WEP/WAPI/TKIP/AES
WiFi Standard: IEEE802.11b/g/n
System Req's: iOS 8.0 or higher, Android 4.1 or higher

Installation

BEFORE INSTALLATION, PLEASE CHECK THAT THE LOCATION OF THE SMART PRODUCT IS WITHIN RANGE OF YOUR HOME WIFI AND THE SIGNAL IS STRONG. MUST BE INSTALLED BY A LICENSED ELECTRICIAN.

IMPORTANT SAFETY ISSUES

Ensure the power is disconnected before installing. This product is NOT suitable for damp or explosive environments.


Modification of this product will void any warranty. Indoor use only. Do not cover in insulation.

The installation must follow AS/NZS 3000 wiring rules and building codes.

When drilling into walls and ceilings, care must be taken to ensure you do not damage electrical wiring and other hidden utilities.

Classification – Class 1

Installation

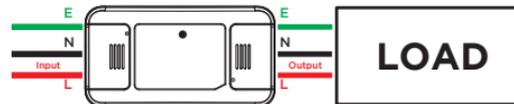

1. Remove terminal block covers.
2. Connect Active, Earth and Neutral In, and Active, Earth and Neutral Out to corresponding terminals.
3. Secure housing as per AS/NZS 3000.
4. Replace terminal block covers.


Connect to your WiFi

Ensure your mobile phone is connected to your 2.4GHz WiFi network.

Your mobile phone and smart device needs to be within 2 bar range of your WiFi router.

Download the BrilliantSmart App

Please download the free BrilliantSmart app from the App store or Google Play store, or scan the QR code below.

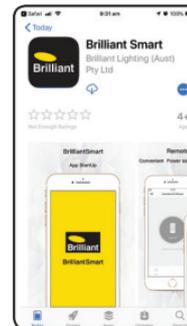


Register the BrilliantSmart App

Open the BrilliantSmart app. For new users, register a new account or if existing user, login with your user name and password.

Configure your BrilliantSmart App

Setting up your Home

You can setup multiple homes or locations. Click 'Add Home' button. Or Click on 'Home' top left if you are adding or modifying details then 'Home Management' to setup your home(s), add or rename rooms and share devices.

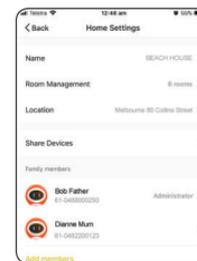

Add your Smart Device to your App

1. On initial power-on, the indicator will begin blinking rapidly and be ready to pair (2 times per second). (If smart device does not automatically start blinking, keep pressing the pairing button for 5–7 seconds, then indicator will start blinking rapidly.)
2. Open the BrilliantSmart App, tap 'Add Device' (if empty room) or '+' to add your smart device.
3. Select 'Connector' in the list of devices.

If indicator is blinking rapidly then press 'Confirm indicator rapidly blink'.

