

## HASTY-8

Variants	Item No.	Colour Temp
Wht	HASTY-8-WHT	3000K - 4000K - 5700K (Switchable)

Thank you for purchasing your new Hasty Downlight, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

### Specifications



Voltage:	240V	Lumen (±5%):	3000K - 700lm 4000K - 750lm 5700K - 800lm	Dimmable:	Yes**
Power:	8W	Beam Angle:	110°	Operating Temp:	-20° ~ 45°
IP Rating:	54	CCT:	3000K - 4000K - 5700K	Cutout:	90-95mm
CRI:	≥80	Lifespan:	50,000hrs		

\* IP54 rating is from the underside of the downlight once installed into the ceiling.

\*\*Fully dimmable with suitable dimmers.

### How to install:

- The LED down light shall be installed in accordance to Australian/NZ electrical standards.
- The LED down light shall be installed in locations and in conditions as described in the below figure.
- Please make sure all electricity is switched off at the main switch board before any electrical works are to commence.
- Cut out the hole according to the downlight cutout table.
- The LED driver is supplied with an Australian approved 2pin flex and plug.
- For easy maintenance Domus recommends the use of plug base sockets in the ceiling.
- If you are intending to hard wire the LED drivers please remove the supplied flex and plug from the LED driver.
- When connecting the LED lamp/down light to the LED driver please ensure the connecting plug is securely pushed in and the connection is not loose.

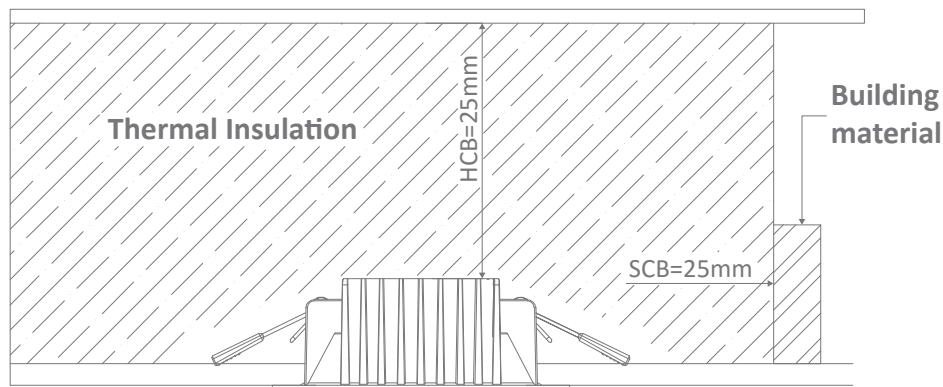

Recessed Luminaire where fixed building insulation material can abut and cover the recessed luminaire.

Building Insulation does not have to be non flammable.

Building Insulation must maintain structural integrity at 90 degrees C.

**Important: IC-4 Downlights are not to be used in the Fire Rated Applications.**

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas