

# Elite Deck or Inground Light Installation Instructions




## Product Specifications

Model No.	HV2881W-SLV	HV2881N-SLV	HV2881C-SLV	HV2881W-BLK	HV2881N-BLK	HV2881C-BLK	HV2882W-SLV	HV2882N-SLV	HV2882C-SLV	HV2882W-BLK	HV2882N-BLK	HV2882C-BLK
Name	Elite						Elite					
Material	Aluminium						Aluminium					
Colour	Silver			Black			Silver			Black		
IP Rating	IP65						IP65					
Input Voltage	12v DC						12v DC					
Lamp Base	Built in LED						Built in LED					
Lamp Wattage	1x 3w						1x 5w					
Colour Temp	3000k	4000k	5500k	3000k	4000k	5500k	3000k	4000k	5500k	3000k	4000k	5500k
Lumens	240lm	250lm	270lm	240lm	250lm	270lm	400lm	420lm	450lm	400lm	420lm	450lm
CRI	> 80						> 80					
Wiring	Parallel						Parallel					
Dimmable	Yes - Triac						Yes - Triac					
Warranty	3 Years Replacement*						3 Years Replacement*					


### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of voltage required and cannot be installed more than 25m from LED Driver, if not within this allowance warranty will be voided.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty.
- These instructions may be updated at any time due to product improvements, Please visit website for most current installation instructions.


### HV2881 Dimensions




### HV2882 Dimensions

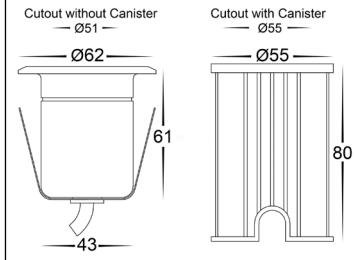

### Sample Wiring Diagram

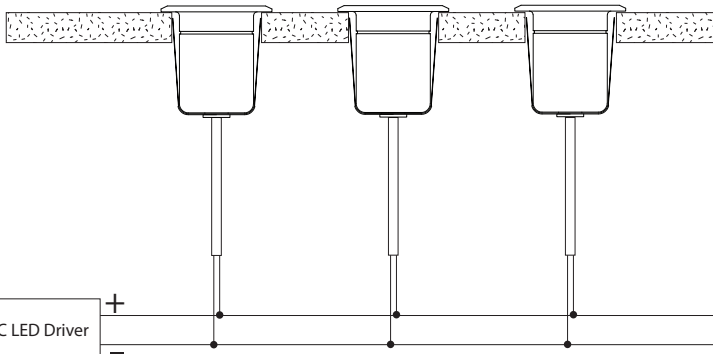

### Sample Adequate Drainage Diagram

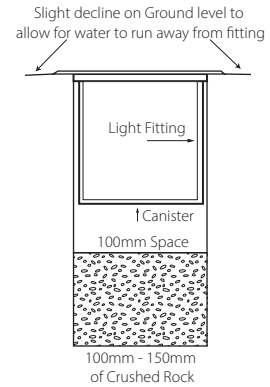

### Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Make a hole where fitting is to be placed using dimensions provided on line drawings, making sure adequate drainage is allowed.
3. Using an appropriate 12v DC LED Driver - DO NOT CONNECT LIGHT FITTING DIRECTLY TO 240V
4. If installing into concrete, insert canister making sure it is flush with ground level.
5. Connect the cable - If more than one fitting installed, wiring must be done in parallel.
6. Strip back the cable on both fitting and cable run and twist the positive cables together. Then connect neutral cables together
7. Solder all joins using solder and either a heat gun or butane gas torch.
8. Cover connections using an adhesive lined heat shrink or gel cap to make connection watertight. Failure to do this will void warranty.
9. Heat the heat shrink or crimp the gel cap making sure all connections are covered.
10. Insert fitting into hole or canister
11. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
12. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Must be installed by a licensed electrician

### Contact Details:

143 Beauchamp Road  
Matraville NSW 2036  
Australia  
Tel: 02 9381 8300  
Fax: 02 9666 8881  
Email: sales@havit.com.au  
Web: www.havit.com.au

### Warranty Terms & Conditions\*



### Additional Information

