




## BULK15-18 LED Exterior Bulkhead Lights

- Input voltage: 180-250V AC 50/60Hz
- Inbuilt constant current driver included
- Driver output voltage: 90V
- Driver input current: 100mA
- Driver output current: 200mA
- Material: PC
- Flex: 85mm
- Bracket: iron
- Power factor:  $\geq 0.9$
- Ambient Temp:  $-20$  to  $+40^{\circ}\text{C}$  (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

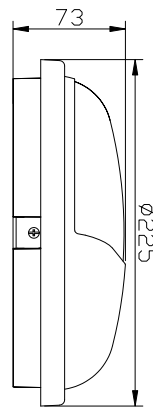

BULK15 & 17



BULK16 & 18


30,000hr Lifetime	120° Beam Angle	<b>IP65</b> Rated	<b>2YEAR</b> Replacement Warranty	
----------------------	--------------------	----------------------	-----------------------------------------	--



Rear



Front

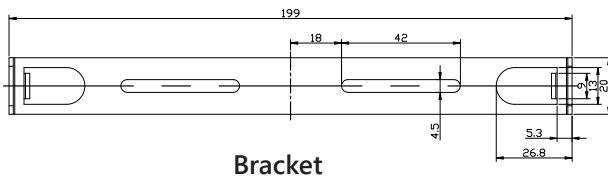

Bracket

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	Lumious Efficiency	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
BULK15	BULKHEAD/WALL LED BLK RND EYELID	3000	1600	80LM/W	20	30PCS 2835	80	0.55	23x23x8	10
BULK16	BULKHEAD/WALL LED WH RND EYELID	3000	1600	80LM/W	20	30PCS 2835	80	0.55	23x23x8	10
BULK17	BULKHEAD/WALL LED BLK RND EYELID	5000	1600	80LM/W	20	30PCS 2835	80	0.55	23x23x8	10
BULK18	BULKHEAD/WALL LED WH RND EYELID	5000	1600	80LM/W	20	30PCS 2835	80	0.55	23x23x8	10

Brochure updated on 18.06.2018

