



VECTOR SMART RECEIVER QUICK SETUP GUIDE

STEP 1 : **DOWNLOAD AND INSTALL BRILLIANT SMART APP FROM QR CODE BELOW**




STEP 2 : **AFTER SMART RECEIVER INSTALLATION, POWER ON THE FAN. YOU WILL HEAR A BEEP SOUND.**

STEP 3 : **WITHIN FEW SECONDS OF POWER ON, PRESS AND HOLD THE FORWARD/REVERSE BUTTON ON THE REMOTE OR WALL CONTROLLER (IF INSTALLED).**

ONCE YOU HEAR 3x BEEP SOUND, RELEASE THE BUTTON. THE FAN SMART RECEIVER IS NOW IN PAIRING MODE.

FOLLOW THE INSTRUCTIONS ON THE BRILLIANT SMART APP TO ADD DEVICE. THE TIME TO ADD DEVICE IS 3 MINUTES. IF TIMEOUT, REPEAT ABOVE STEPS AGAIN.

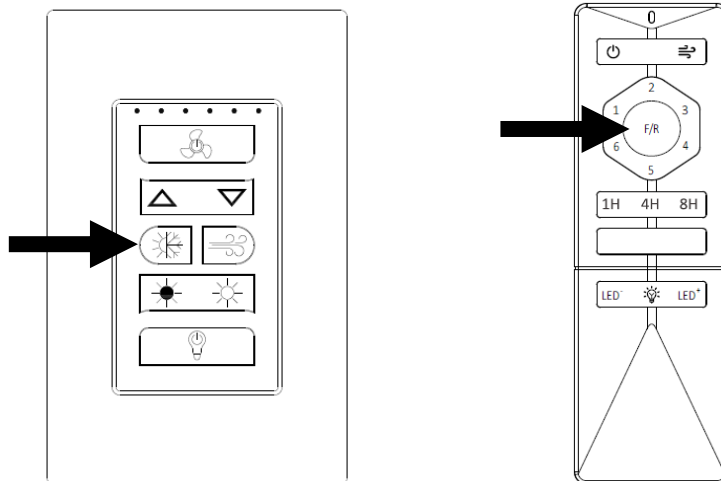



VECTOR SMART RECEIVER QUICK SETUP GUIDE

Unpairing Process

Steps for unpairing extra handheld remotes to the receiver

- STEP 1 :** Make sure the SMART receiver is connected to your brilliant lighting app.
- STEP 2 :** click on the smart ceiling fan or the name it was set to.
- STEP 3 :** Press the edit icon top right, then scroll down till you see in red text remove device And press on remove device then select disconnect and wipe data.
- STEP 4 :** Leave for about 60 seconds, Then power cycle the receiver by turning the power off VIA the isolation switch, Then after 10-20seconds turn the power back on.
- STEP 5 :** Repair the handheld remote to the receiver within 3-5 seconds of turning the power back on by holding the Fan OFF button top right of the handheld remote.

Multiple fans and handheld remotes

- STEP 1 :** Make sure that all power is turned off to all the fans VIA the isolation switch.
- STEP 2 :** Only power up one fan at a time and do the above process.
- STEP 3 :** Once completed turn the power off to that first fan, And power up the next fan and do the above process and repeat for more than two fans.
- STEP 4 :** Once both fans and handhelds are separate again, then both or more fans can all be powered back up.
- STEP 5 :** If a handheld hasn't been removed, please follow the above process again.