

VIVID RGB RF Controller

Technical Parameters (remote control)

Working voltage: DC12V/24V


Receiving range: 20 metres

Control current: 18A

Dimension: 130x80x55mm

Total power: 216W

Weight: 325g

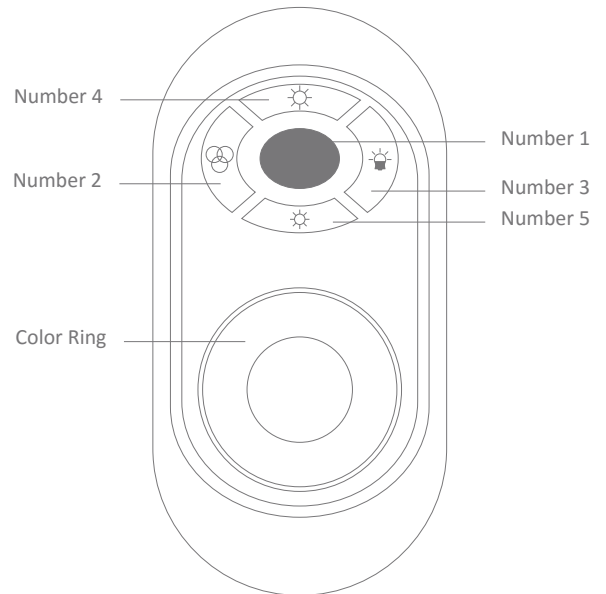

Key Functions

Key 1: on/off

Key 2: light colour changing mode (15 modes)

Key 3: Color light/white light switching mode

Key 4: Turn up (brightness/speed)

Key 5: Turn down (brightness/speed)


How to use

1. Press Key 1 to turn on/off in any state.
2. Press Key 2 to activate light changing mode, a new mode each press, 15 modes in total.
3. Press Key 3 once to activate white light mode, changing brightness by pressing Key 4/Key 5. Press Key 3 twice to activate colour light mode, changing brightness by pressing Key 4/Key 5 or changing light color by touching the colour ring.
4. Resume function - The previous settings will be resumed while power on again.
5. Matching code: Press Key 4 once within 3 seconds when power on again, the light will blink 3 times if matching is successful.
Clearing code: Press Key 4 five times within 3 seconds when power on again, the light will blink 6 times if clearing is successful.

Specifications

1	Auto colour changing	8 grades of models to adjust by pressing Key 4/Key 5.
2	Three colours jumps to change	
3	Seven colours jumps to change	
4	Three colours jumps to gradual change	
5	Seven colours jumps to gradual change	
6	Red colour jumps to change	
7	Blue colour jumps to change	
8	Purple colour jumps to change	
9	Green colour jumps to change	
10	Yellow colour jumps to change	
11	Cyan colour jumps to change	
12	White colour jumps to change	
13	Red/blue light twinkles alternately	
14	Green/blue light twinkles alternately	
15	Red/green light twinkles alternately	

Linking Operation

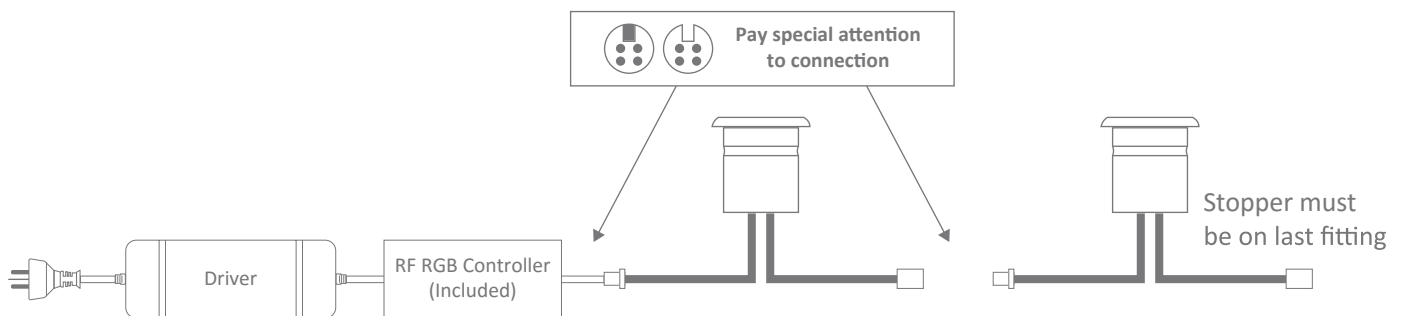

Note: -The lamp must be installed by professional electrician
 -Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
 -Keep away from hot steam and corrosive gas