



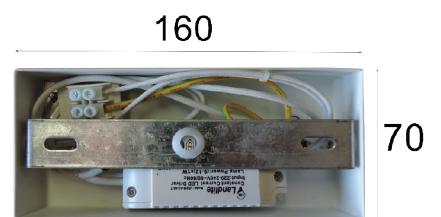

GENEVA

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 25-42V
- Driver input current: 0.2A
- Driver output current: 0.3A
- Power factor: 0.5
- Material: iron & aluminium powder coated white & acrylic
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

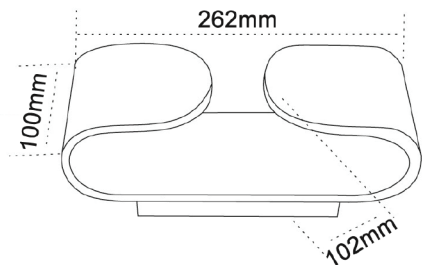

Back Plate

Depth: 20mm
Mounting U Bracket: 150x22mm
Central 7mm Cable entry



PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
GENEVA	3000	822	71	10	60pcs 2835	>=80	2.0	32x15x12	12

Brochure updated on 11.05.2018