

# EXTERIOR LED BOLLARD LIGHTS





## PRODUCT FEATURES

- Input voltage: 12-14V AC/DC 50/60Hz
- Nominal current: 150mA
- Recommended CLA drivers: DRIV1/ OTTER1/ CLA111011/ CLA113011/ CLA115011/ CLA1115011
- Wattage: 6W
- Material: 316 stainless steel or solid copper
- PORTUS1SP spike material: brass
- 12pcs Sanán 2835 LED chips
- Cable length: 47mm
- Ambient temp: -40 to +85°C
- CRI: 75

LIFE TIME 40,000 HOURS	BEAM 120°	IP67 RATED	WARRANTY 2YEARS REPLACEMENT
------------------------------	--------------	---------------	-----------------------------------

### Recommended Driver

Recommended Driver	PCS per driver
DRIV1	1PC
OTTER1	1PC
CLA111011	1PC
CLA113011	2-4PCS
CLA115011	4-7PCS
CLA1110011	10-14PCS
CLA1115011	14-20PCS

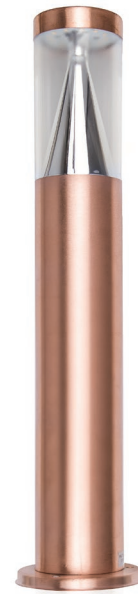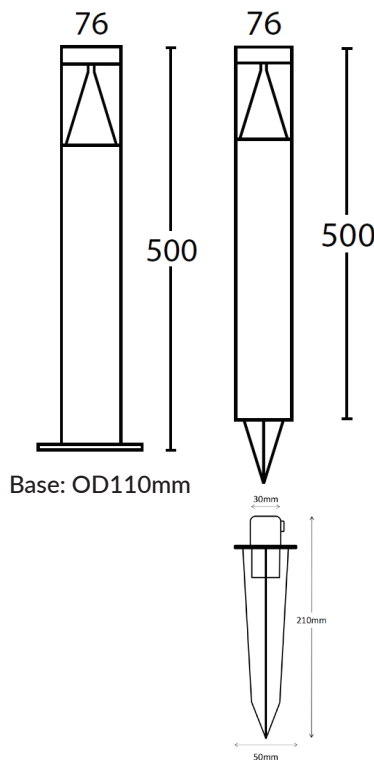

PORTUS1FLC



PORTUS1FSS



PORTUS1SPC



PORTUS1SPSS

Brass Spike

CODE	DESCRIPTION	TECHNICAL DATA				PACKAGING DETAILS		
		COLOUR	KELVIN	LUMENS	WATT	WEIGHT (KG)	BOX (CM)	CARTON QTY
PORTUS1FLC	BOLLARD LED 12V COP Anti Glare L500mm with Flange	Polishing copper	3000K	620LM	6	1.6	11x11x50	10
PORTUS1FLSS	BOLLARD LED 12V SS316 Anti Glare L500mm with Flange	Stainless steel clear anodized	3000K	620LM	6	1.4	11x11x50	10
PORTUS1SPC	SPIKE LED 12V COP Anti Glare	Polishing copper	3000K	620LM	6	1.9	11x11x50	10
PORTUS1SPSS	SPIKE LED 12V SS316 Anti Glare	Stainless steel clear anodized	3000K	620LM	6	1.7	11x11x50	10

UPDATED ON 09.02.2018

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting