


# LED R63 & R80 GLOBES



Devoted to energy saving

## FEATURES

- Input voltage: 220-240V AC 50/60Hz
- Aluminium Heatsink with thermal conductive plastic
- Frosted PC lamp cover
- Humidity 25+- 2°C ≤90%
- CRI: 80
- Beam angle: 105°
- Not suitable for dimming
- 3 year replacement warranty

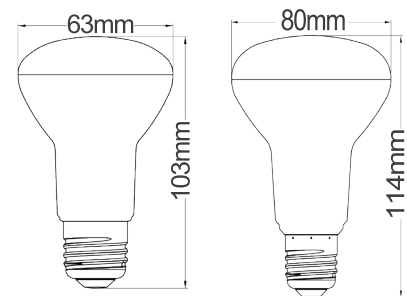

R63

R80

## TECHNICAL DATA

CODE	DESCRIPTION	LED CHIPS	BASE	KELVIN (K)	LUMENS (lm)	WATT (W)	LIFE TIME(hrs)	AMBIENT TEMP	IP RATING
R63L1A	LED R63 E27 3000K	14PCS EPISTAR SMD2835 LEDs	E27	3000	550	8-50	25,000	-20°C ~55°C	IP42
R63L2B	LED R63 E27 5000K	7PCS SANÁN SMD2835 LEDs	E27	5000	640	8-50	15,000	-20°C ~55°C	IP20
R80L1B	LED R80 E27 3000K	9PCS SANÁN SMD2835 LEDs	E27	3000	780	10-65	15,000	-20°C ~55°C	IP20
R80L2B	LED R80 E27 5000K	9PCS SANÁN SMD2835 LEDs	E27	5000	820	10-65	15,000	-20°C ~55°C	IP20

UPDATED ON 01.11.2017

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting

**CLA LIGHTING**