


# Curved Pendant Installation Instructions




## Product Specifications

Model No.	HCP-6923235-1-1/2	HCP-6923235-1-1/4	HCP-6923235-2-1/4
Name	Proline		
Material	Aluminium		
Colour	Black		
IP Rating	IP20		
Installation Type	Ceiling - Suspended		
Suspension Length	2 Metres - Adjustable		
Input Voltage	24v DC (Requires 24v DC External LED Driver)		
Protection Class	3 (No Earth Required)		
Lamp Base	Built in LED		
Lamp Wattage	30w	15w	15w
Colour Temp	TRI Colour - 3000k, 4000k, 5000k	TRI Colour - 3000k, 4000k, 5000k	TRI Colour - 3000k, 4000k, 5000k
Lumens	2300lm, 2400lm, 2500lm	1100lm, 1150lm, 1200lm	1100lm, 1150lm, 1200lm
CRI	> 80		
Wiring	Parallel		
Dimmable	Triac + 0-1/10v, Dali		
Warranty	5 Years Replacement*		


**HCP-6923235-1-1/2 Dimensions**

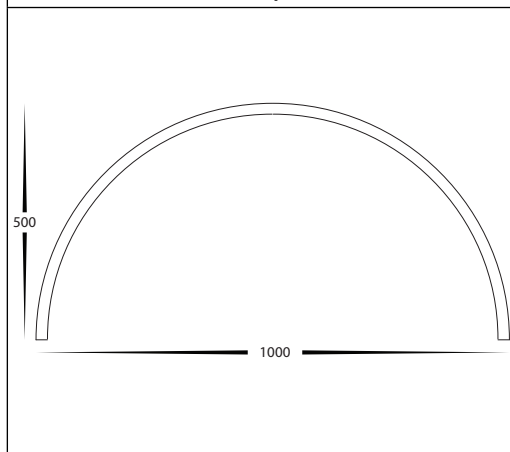

**HCP-6923235-1-1/4 Dimensions**

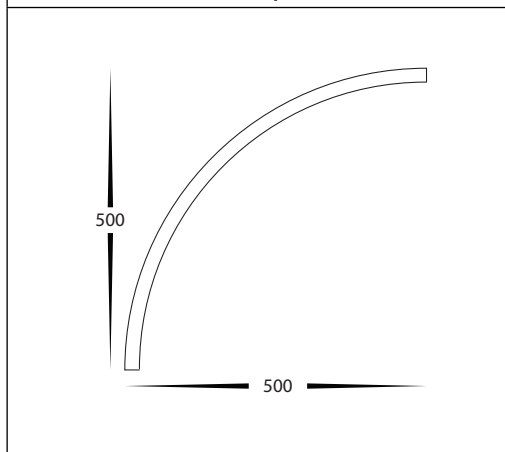

**HCP-6923235-2-1/4 Dimensions**

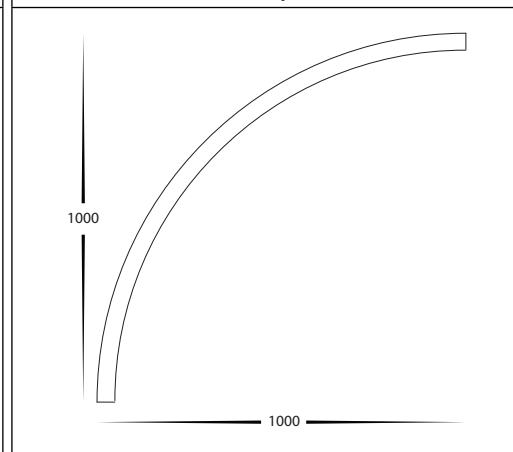

### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product other than adjusting cable lengths will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 2km of any salt water environments.
- This fitting is supplied with a LED Driver which is installed inside Pendant.
- All Suspension cables supplied must be used when installing pendant, if not all used warranty will be voided.

### Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove the mounting bracket from suspension kit by twisting anti clockwise.
3. Measure and mark positions for suspension kits where these are to be installed.
4. Install the mounting bracket and other suspension kit fasteners to ceiling securely with appropriate screws to suit application.
5. Insert suspension cable into suspension kits installed and slide cable through side of mounting bracket attached to ceiling.
6. Attach suspension kit to mounting bracket attached to ceiling by twisting clockwise.
7. Adjust cable to desired length from ceiling mounting brackets and leave excess cable hanging to the side
8. Once cables are at desired length, pull on cable gently to make sure cable is securely locked into place without slipping. If cable slips, The suspension kit must be replaced.
9. Drill small hole in ceiling and insert excess cable into ceiling space for connection to LED driver
10. Connect power cable to power feed - Connect Positive 1st then select desired colour temperature on cable marked to negative of LED Driver.
11. If connecting multiple fittings to form a circle or other shapes, Repeat steps above and connect joiners by removing diffuser and sliding joiners into profile and tightening the allen screws.
12. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

**Must be installed by a licensed electrician**

#### Contact Details:

8/133 Beauchamp Road  
Matraville NSW 2036  
Australia  
Tel: 02 9381 8383  
Email: sales@havitcommercial.com.au  
Web: www.havitcommercial.com.au

#### Warranty Terms & Conditions\*



[www.havitcommercial.com.au](http://www.havitcommercial.com.au)

