


110295 LM_LED_GU10 - V1



COMMISSION DELEGATED REGULATION (EU) 2019/2015
with regard to energy labelling of light sources

EGLO Leuchten GmbH, Heiligkreuz 22, 6136 Pill, AT

General Information

Trade mark	EGLO
Material number	110295
Type	lightbulb
Light colour Complete	WARM WHITE
Illuminant Type (1)	GU10-LED
EAN/UPC	9008606294503
Energy efficiency class (EEI)	F

Dimensions



Article Diameter (in mm)	50
Article Length (in mm)	56

110295


LM_LED_GU10 - V1

Technical Information

Equivalent power (W)	42
Lighting Technology	LED
Directional Light source	No
Lamp cap (Socket)	GU10
Mains light source	Yes
Connected light source	No
Colour-tunable light source	No
High luminance light source	No
Dimmable (bulb, board, stripe,...)	Yes
Energy consumption (kWh/1000h)	6
Rated useful lumen	500
Beam angle (°) - at measurement	360
Color temperature (K)	3000
Nominal wattage (W)	5,8
Chromaticity coordinates x (1)	0,44
Chromaticity coordinates y (1)	0,403
Color rendering index (CRI)	90
Lamp survival factor @3000h	> = 90 %
Lumen maintenance factor @3000h % in decimal number	0,96
Displacement factor DF (PF)	0,5
Flicker Metric / Pst LM	0,2
Stroboscopic Effect Metric / SVM	0,4

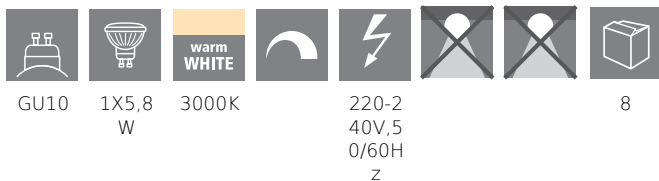

110296 LM_LED_GU10 - V1



COMMISSION DELEGATED REGULATION (EU) 2019/2015
with regard to energy labelling of light sources

EGLO Leuchten GmbH, Heiligkreuz 22, 6136 Pill, AT

General Information









Trade mark	EGLO
Material number	110296
Type	lightbulb
Light colour Complete	WHITE
Illuminant Type (1)	GU10-LED
EAN/UPC	9008606294510
Energy efficiency class (EEI)	F

Dimensions

Article Diameter (in mm)	50
Article Length (in mm)	56

Technical Information

Equivalent power (W)	42
Lighting Technology	LED
Directional Light source	No
Lamp cap (Socket)	GU10
Mains light source	Yes
Connected light source	No
Colour-tunable light source	No
High luminance light source	No
Dimmable (bulb, board, stripe,...)	Yes
Energy consumption (kWh/1000h)	6
Rated useful lumen	500
Beam angle (°) - at measurement	360
Color temperature (K)	4000
Nominal wattage (W)	5,8
Chromaticity coordinates x (1)	0,38
Chromaticity coordinates y (1)	0,38
Color rendering index (CRI)	90
Lamp survival factor @3000h	> = 90 %
Lumen maintenance factor @3000h % in decimal number	0,96
Displacement factor DF (PF)	0,5
Flicker Metric / Pst LM	0,2
Stroboscopic Effect Metric / SVM	0,4

GU10 1x5,8 W 4000K 220-240V, 50/60Hz 8

