


Expo-10-Rec LED Recessed Downlight



Description

The Expo-10 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.

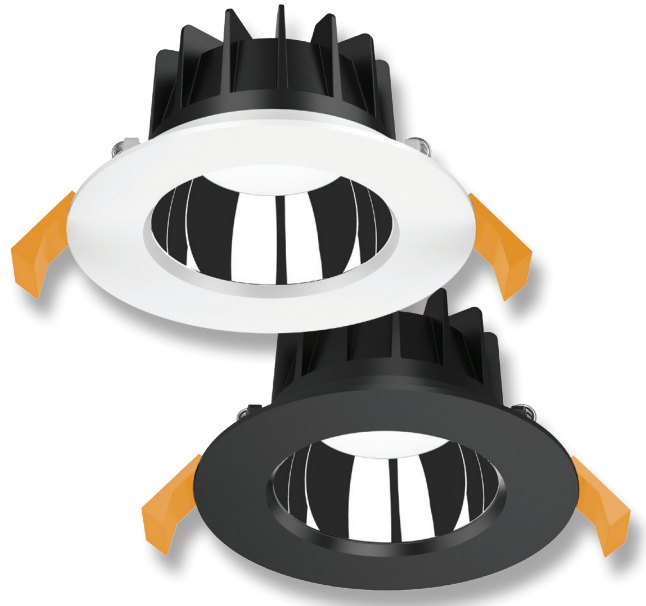


Specification Features

Input Voltage: 240V AC
 Power (W): 10W
 IP rating (IP): IP44
 Lumens (lm): Warm White 3000K - 710lm
 Neutral White 4000K - 780lm
 White 5700K - 850lm
 LED type: SMD
 CCT: 3000K - 4000K - 5700K (Switchable)
 CRI: ≥80
 Beam angle (°): 80°
 Dimmable: Yes
 Lifespan (hrs): 50,000hrs
 Cutout (∅): ∅90-95mm



Diagrams / Additional

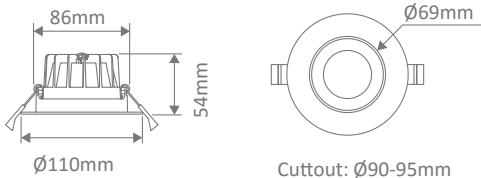

Item No.	Variant	Colour Temperature
EXPO-10-REC-BLK	20710	TRIO
EXPO-10-REC-WHT	20711	TRIO

Expo-25-Rec LED Recessed Downlight



Description

The Expo-25 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.




Specification Features

Input Voltage: 240V AC
 Power (W): 25W
 IP rating (IP): IP44
 Lumens (lm): Warm White 3000K - 2200lm
 Neutral White 4000K - 2400lm
 White 5700K - 2600lm
 LED type: SMD
 CCT: 3000K - 4000K - 5700K (Switchable)
 CRI: ≥80
 Beam angle (°): 80°
 Dimmable: Yes
 Lifespan (hrs): 50,000hrs
 Cutout (∅): ∅150-165mm



Diagrams / Additional

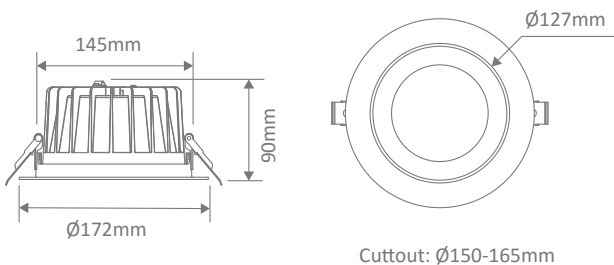

Item No.	Variant	Colour Temperature
EXPO-25-REC-BLK	20712	TRIO
EXPO-25-REC-WHT	20713	TRIO

Expo-35-Rec LED Recessed Downlight



Description

The Expo-35 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.




Specification Features

Input Voltage: 240V AC
 Power (W): 35W
 IP rating (IP): IP44
 Lumens (lm): Warm White 3000K - 3650lm
 Neutral White 4000K - 3750lm
 White 5700K - 3850lm
 LED type: SMD
 CCT: 3000K - 4000K - 5700K (Switchable)
 CRI: ≥80
 Beam angle (°): 80°
 Dimmable: Yes
 Lifespan (hrs): 50,000hrs
 Cutout (∅): ∅200-210mm



Diagrams / Additional

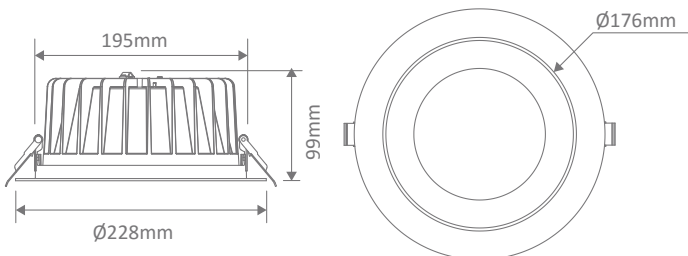

Cuttout: ∅200-210mm

Item No.	Variant	Colour Temperature
EXPO-35-REC-BLK	20714	TRIO
EXPO-35-REC-WHT	20715	TRIO