


Lexan Surface Mounted Downlight Installation Instructions




Product Specifications

Model No.	HV5831T-BLK	HV5831T-WHT	HV5832T-BLK	HV5832T-WHT
Name	Lexan			
Material	Polycarbonate			
Colour	Black	White	Black	White
IP Rating	IP54			
Input Voltage	240v AC			
Lamp Base	Built in LED			
Lamp Wattage	1x 3/5/7w			
Colour Temp	TRI Colour - 3000k, 4000k, 5500k			
Lumens	200-560lm, 255-595lm, 270-630lm			
CRI	> 80			
Wiring	Parallel			
Dimmable	Yes - Triac Dimmable			
Warranty	3 Years Replacement*			

HV5831T Dimensions

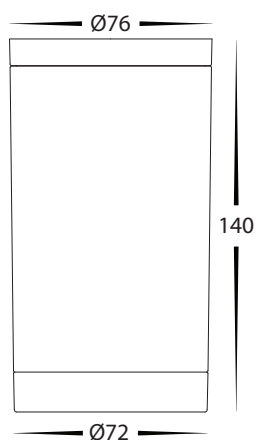

HV5832T Dimensions

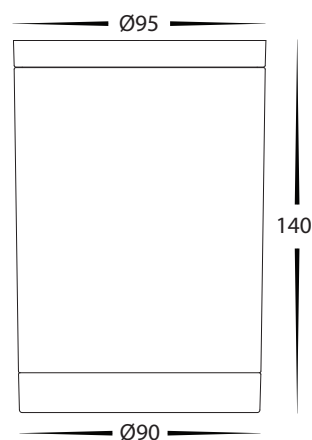

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove base plate by twisting anti clockwise.
3. Remove globe and set aside.
4. Install base plate in desired location
5. Connect the cable: First positive and then neutral
6. Colour temperature and wattage is preset to 3000k and 7w, Select desired colour temperature and wattage by moving switches on bottom of globe and insert globe into lampholder.
7. Reattach fitting to base plate by twisting clockwise
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Steps for Changing Globe:

1. Remove the cover by twisting anti-clockwise and set aside, remove globe by also twisting anti-clockwise.
2. Re-insert the appropriate globe by inserting the 2 circular pins into the lampholder and twisting clockwise.
(Make sure not to exceed max wattage, see product label for correct info)
3. Reattach cover by turning clockwise making sure the seals are still in place and is tight to avoid any water penetration.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



Additional Information

