




# Proline Slim 1200mm

## LED Pendants

|                   |   |
|-------------------|---|
| Name              | Proline   |
| Material          | Aluminium   |
| Colour            | Powder Coated Black or White  |
| IP Rating         | IP20  |
| Colour Temp       | <div><div></div>3000k</div> <div><div></div>4000k</div> <div><div></div>5500k</div> |
| IK Rating         | IK05  |
| Cable Length      | 3500mm Adjustable   |
| Installation Type | Ceiling - Surface Mounted   |
| Diffuser Type     | Polycarbonate   |
| Lamp Base         | Built in LED  |
| Max Wattage       | 40w LED   |
| Protection Class  | 1 (Requires Earth)  |
| Lamp Expectancy   | <30,000hrs  |
| CRI               | CRI>80  |
| Dimmable          | Triac Dimmable  |
| Warranty          | 3 Years Replacement   |



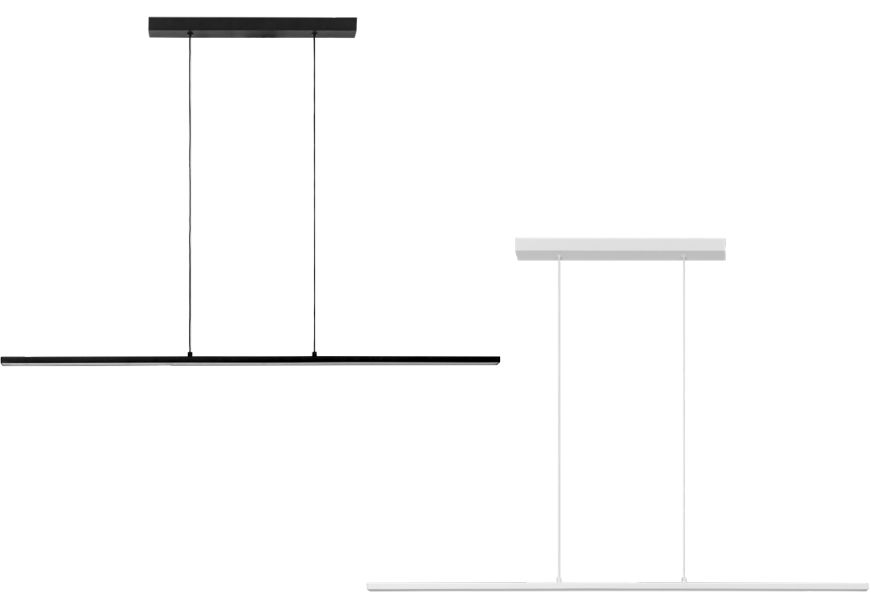

Warranty  
Terms & Conditions




Website

### Product Ordering


| Image   | Part Number        | Colour Temp             | Lumens                     | Input Voltage | Beam Angle | Included LED                          | Barcode       |
|---|--------------------|-------------------------|----------------------------|---------------|------------|---------------------------------------|---------------|
|  | <b>HV6005T-BLK</b> | 3000k<br>4000k<br>5500k | 3000lm<br>3270lm<br>3440lm | 240V AC       | 120°       | <b>TRI Colour</b><br>40w Built in LED | 9350418037336 |
|  | <b>HV6005T-WHT</b> |                         |                            |               |            |                                       | 9350418037343 |

### Dimensions

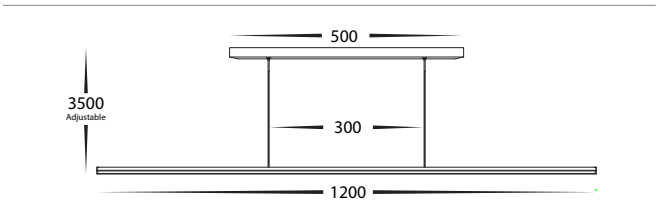

# Proline Slim 1600mm LED Pendants

|                   |   |
|-------------------|---|
| Name              | Proline   |
| Material          | Aluminium   |
| Colour            | Powder Coated Black or White                                    |
| IP Rating         | IP20  |
| Colour Temp       | <div> <div>3000k</div> <div>4000k</div> <div>5500k</div> </div> |
| IK Rating         | IK05  |
| Cable Length      | 3500mm Adjustable   |
| Installation Type | Ceiling - Surface Mounted                                       |
| Diffuser Type     | Polycarbonate   |
| Lamp Base         | Built in LED  |
| Max Wattage       | 50w LED   |
| Protection Class  | 1 (Requires Earth)  |
| Lamp Expectancy   | <30,000hrs  |
| CRI               | CRI>80  |
| Dimmable          | Triac Dimmable  |
| Warranty          | 3 Years Replacement   |

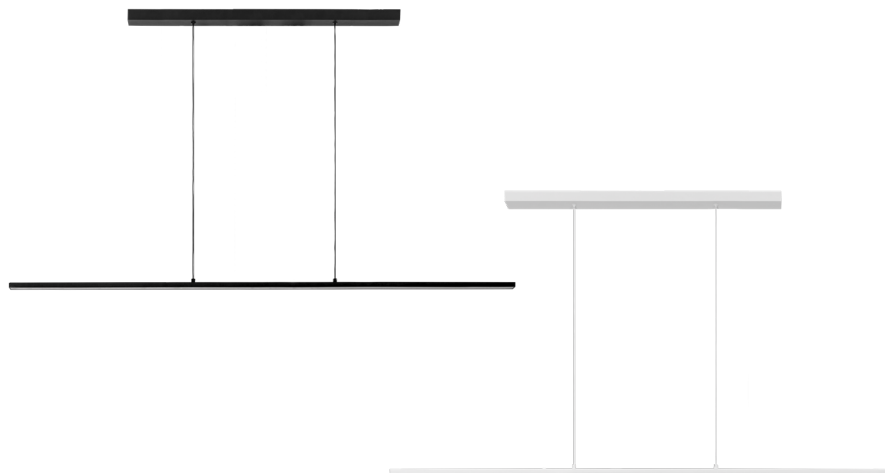

## Product Ordering

| Image | Part Number        | Colour Temp             | Lumens                     | Input Voltage | Beam Angle | Included LED                          | Barcode       |
|-------|--------------------|-------------------------|----------------------------|---------------|------------|---------------------------------------|---------------|
|       | <b>HV6006T-BLK</b> | 3000k<br>4000k<br>5500k | 3750lm<br>4080lm<br>4300lm | 240V AC       | 120°       | <b>TRI Colour</b><br>50w Built in LED | 9350418037350 |
|       | <b>HV6006T-WHT</b> |                         |                            |               |            |                                       | 9350418037367 |

## Dimensions

