


Mini Tri Colour Recessed Downlight Installation Instructions

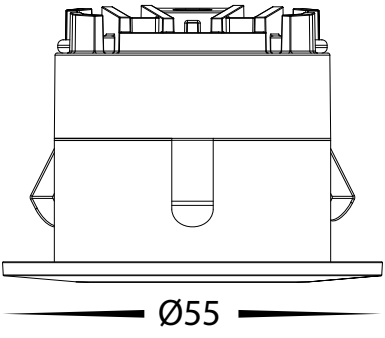




Product Specifications		
Model No.	HCP-8120502	HCP-8130502
Material	Aluminium + Plastic	
Colour	Black	White
IC Rating	IC-4	
IP Rating	IP54 - Front of Fitting Only	
Cut Out	Ø45mm	
Tilt	No	
Input Voltage	240v (Remote Driver)	
Protection Class	2 (No Earth Required) ☐	
Lamp Base	Built in LED	
Lamp Wattage	1x 5w	
Colour Temp	Tri-Colour -3000k, 4000k, 5000k	
Lumens	139lm, 165lm, 143lm	
CRI	> 80	
Dimmable	Triac Dimmable	
Warranty	5 Years Replacement*	

Dimensions
Cut Out: Ø45mm 

Important Safety Issues: - This product must be installed by a qualified electrician according to AS/NZS 3000. - Ensure all electrical mains are disconnected before any installation. - Modification of this product will void any warranty. - Only LED Fitting can be installed under insulation, LED Driver must not be covered to allow for ventilation. - This fixture must not be installed with loose fill insulation such as macerated paper and wool. LED driver must be mounted above any insulation covering the fixture. - Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system. - Aluminium and 304SS fittings must not be installed within 5km of any salt water environments. - All o-rings and seals must be in place correctly to maintain warranty - This form may be updated at any time due to product improvements, please check online installation form for most current version.
--

Steps for Installation: - Make sure that the electrical circuit is free of voltage (master switch off) - Cut out hole using dimensions in table and on line drawings above for model purchased making sure each hole is not under joist or pipes. - Fitting is provided with flex and plug, Plug cable into plug base installed earlier. - Fitting is preset to 3000k, to change slide switch on located on cable to desired colour temperature. - Before installing downlight, Make sure LED Driver is not covered by any insulation. - Push fitting gently into hole until firmly in place. - All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

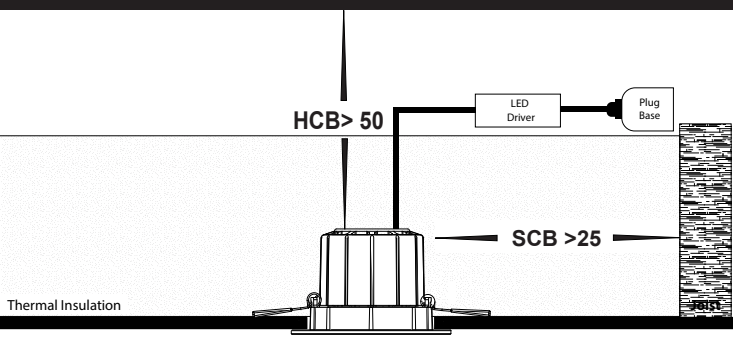Sample Installation Diagram: 
--



Must be installed by a licensed electrician

Contact Details: 8/133 Beauchamp Road Matraville NSW 2036 Australia Tel: 02 9381 8383 Email: sales@havitcommercial.com.au Web: www.havitcommercial.com.au	Warranty Terms & Conditions* 	www.havitcommercial.com.au 
--	---	---