

# 8-10W 360° ROTATABLE DALI TUNABLE TILT LED DOWNLIGHT

Web: [www.havitcommercial.com.au](http://www.havitcommercial.com.au)  
Email: [sales@havitcommercial.com.au](mailto:sales@havitcommercial.com.au)  
Phone: 02 9381 8383

ADDRESS: 8/133 Beauchamp Road, Matraville, N.S.W., 2036



Warranty T & Cs





Website



## PRODUCT SPECIFICATIONS

|                   |  |
|-------------------|--|
| MATERIAL          | ALUMINIUM                                  |
| COLOUR / FINISH   | BLACK OR WHITE                             |
| INSTALLATION TYPE | CEILING - RECESSED                         |
| CUT OUT           | Ø83MM TO Ø90MM                             |
| COLOUR TEMP       | 1800K - 4000K (TUNABLE)                    |
| LUMENS            | 375LM - 770LM                              |
| INPUT VOLTAGE     | 240V (SUPPLIED WITH FLEX & PLUG)           |
| PROTECTION CLASS  | 2 (NO EARTH REQUIRED)                      |
| LAMP BASE         | BUILT IN 8-10W LED (SWITCHABLE ON FITTING) |
| DIMMING           | DALI 2 DIMMABLE                            |
| CRI               | RA >90                                     |
| BEAM ANGLE        | 60°  |
| IK RATING         | IK04                                       |
| IP RATING         | IP65                                       |
| LAMP EXPECTANCY   | >50,000HRS*                                |
| SDCM              | <6   |
| UGR               | <27  |
| IC RATING         | IC-4                                       |
| TILT              | 30°  |
| ROTATABLE         | 360°                                       |
| WARRANTY          | 5 YEARS REPLACEMENT*                       |



## PRODUCT ORDERING


|  |              |                 |             |
|--|--------------|-----------------|-------------|
|  | HCP-81251010 | 1800K           | 375LM-770LM |
|  | HCP-81351010 | 4000K (TUNABLE) |             |

\*See Warranty Terms & Conditions for more Information




## DIMENSIONS

Cut Out: Ø83-90mm

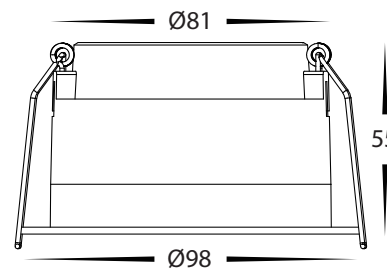

## SAMPLE INSTALLATION DIAGRAM

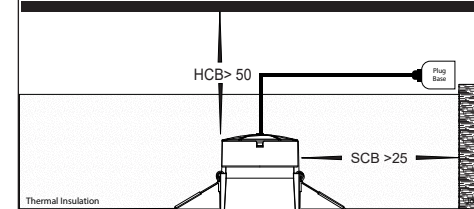

1800K

3000K

4000K