



Product Specifications

Model No.	HV3662T-BLK-240V	HV3662T-WHT-240V
Name	Contec	
Material	Aluminium	
Colour	Black	White
Installation Type	Wall - Surface Mounted	
IP Rating	IP65	
Input Voltage	240v AC	
Protection Class	1 - Earth Required ⚡	
Lamp Base	Built in LED	
Lamp Wattage	2x 5w	
Colour Temp	Tri Colour - 3000k, 4000k, 5500k	
Lumens	2x 420lm, 2x 495lm, 2x 490lm	
CRI	> 80	
Dimmable	No	
Warranty	3 Years Replacement*	

Dimensions

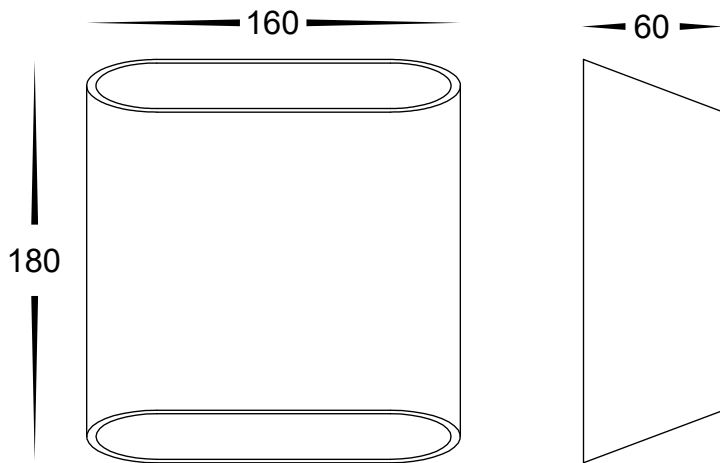

Mounting Dimensions

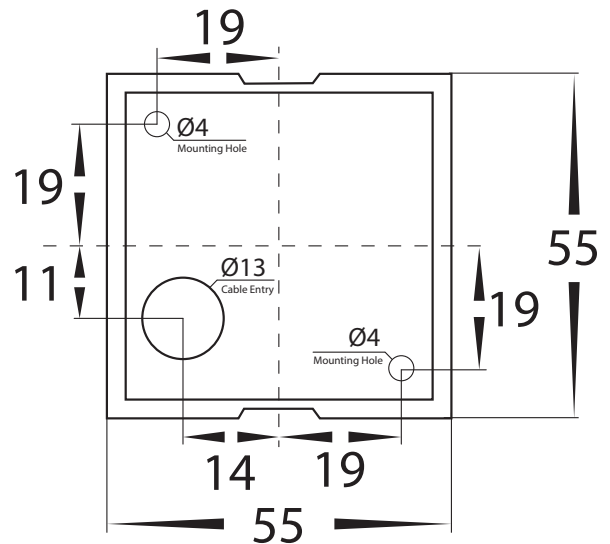

Important Safety Issues:

- Installation must be carried out by a licensed electrician in accordance with AS/NZS 3000 wiring rules.
- Ensure mains power is disconnected before installation.
- Do not modify the fitting in any way, as this will void warranty.
- Ensure all seals, gaskets, and cable entries are correctly installed to maintain IP rating.
- Aluminium fittings should not be installed within 5km of saltwater environments.
- Failure to correctly seal the fitting may allow water ingress and void warranty.
- Before drilling, cutting, or installing, ensure there are no concealed electrical cables, water pipes, or gas lines behind the mounting surface.
- Do not install the fitting on surfaces subject to excessive vibration or movement.
- The fitting must not be covered with insulation material or combustible materials.
- Do not install near heat sources, gas appliances, or areas with excessive ambient temperatures.
- Ensure the mains supply voltage matches the product rating of 240V AC.
- Disconnect power immediately if the fitting becomes damaged, cracked, or exposed to moisture internally.
- Do not attempt to replace the built-in LED module, as it is non-serviceable.
- This product contains electronic components that must not be disposed of with general household waste.
- Maintain all IP65 seals and gaskets during installation to prevent water ingress.
- Suitable for exterior wall mounting only. Do not install in-ground, underwater, or fully submerged applications.
- Avoid direct high-pressure water exposure from pressure washers or irrigation systems.
- Ensure drainage is maintained and the fitting is not installed in locations where water can pool around cable entries.
- Use only appropriately rated junctions, cable glands, and connectors suitable for outdoor installations.
- Do not energise the fitting while partially assembled.
- Keep packaging materials away from children during installation.
- Allow fitting to cool before handling if recently operated.
- Isolate power before cleaning, maintenance, or inspection.
- Failure to follow installation instructions may result in electric shock, fire hazard, product failure, or voided warranty.

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



www.havit.com.au



Installation Procedure

Step 1 – Isolate Power

Switch off the electrical supply at the main switchboard and confirm the circuit is de-energised before commencing work.

Step 2 – Remove Mounting Plate

Loosen the fixing screws and separate the mounting bracket/base plate from the wall light fitting.

Step 3 – Prepare Mounting Surface

Position the mounting plate on the wall in the desired location and mark fixing points.

Ensure:

- Mounting surface is flat and secure.

Step 4 – Install Mounting Plate

- Feed supply cable through the cable entry.
- Secure the mounting plate to the wall using suitable fixings appropriate for the mounting surface.

Seal:

- Cable entry hole
- Screw penetrations
- Any exposed openings

using exterior-grade silicone sealant.

Step 5 – Electrical Connection

Connect wiring as follows:

- Earth - Earth terminal
- Active (Live) - Active terminal
- Neutral - Neutral terminal

Ensure all terminals are secure and no bare conductors are exposed.

Step 6 – Select Colour Temperature

Locate the TRI-colour switch inside the fitting and select desired colour temperature:

- 3000K – Warm White
- 4000K – Neutral White
- 5500K – Cool White

Step 7 – Attach Fitting

Carefully position the fitting onto the mounting plate.

Tighten all fixing screws securely to maintain weatherproof sealing.

Step 8 – Final Sealing

Apply silicone around the perimeter of the fitting where it meets the wall to prevent moisture ingress.

Step 9 – Cover Installation

Slide cover over Light Module making clips have applied pressure so cover is securely in place.

Step 10 – Test Operation

Restore mains power and test fitting operation.

Confirm:

- Correct illumination
- Stable mounting
- Proper colour temperature selection

Maintenance

- Clean only with a soft damp cloth.
- Do not use abrasive cleaners or solvents.
- Periodically inspect seals and fixings for deterioration.

Warranty

This product includes a 3-year replacement warranty subject to correct installation and use.

Warranty may be void if:

- Incorrect voltage is applied
- Water ingress occurs due to poor sealing
- Product is modified or incorrectly installed

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



www.havit.com.au

