


Proline Pendant Installation Instructions




Product Specifications

| Model No. | HV6005T-BLK | HV6005T-WHT | HV6006T-BLK | HV6006T-WHT |
|-------------------|----------------------------------|-------------|----------------------------------|-------------|
| Name | Proline | | Proline | |
| Material | Aluminium | | Aluminium | |
| Colour | Black | White | Black | White |
| Installation Type | Ceiling - Surface Mounted | | Ceiling - Surface Mounted | |
| Cable Length | 3500mm Adjustable | | 3500mm Adjustable | |
| IP Rating | IP20 | | IP20 | |
| Input Voltage | 240v | | 240v | |
| Protection Class | 1 (Requires Earth) ⚡ | | 1 (Requires Earth) ⚡ | |
| Lamp Base | Built in LED | | Built in LED | |
| Lamp Wattage | 1x 40w | | 1x 50w | |
| Colour Temp | TRI-Colour - 3000k, 4000k, 5500k | | TRI-Colour - 3000k, 4000k, 5500k | |
| Lumens | 3000lm, 3270lm, 3440lm | | 3750lm, 4080lm, 4300lm | |
| CRI | > 80 | | > 80 | |
| Wiring | Parallel | | Parallel | |
| Dimmable | Yes - Triac Dimmable | | Yes - Triac Dimmable | |
| Warranty | 3 Years Replacement* | | 3 Years Replacement* | |

HV6005T Dimensions

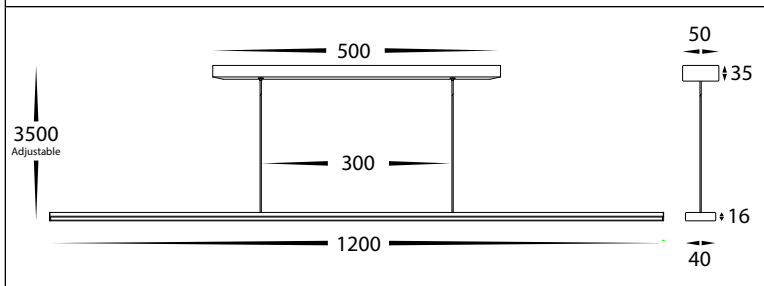

HV6006T Dimensions

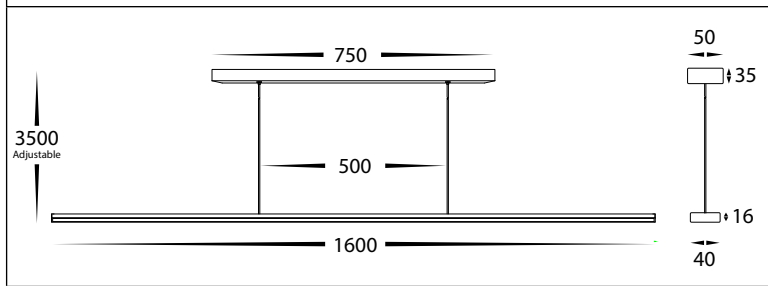

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove bracket from canopy by removing screws from side and set aside.
3. Install Bracket in desired location using appropriate screws for application
4. Adjust cable length and cut off any excess.
5. Connect the cable: Use wire with earth, connect earth first then positive and then neutral
6. Fitting is preset to 3000k, To change slide switch located in canopy of fitting to desired colour temperature
7. Reattach canopy to bracket by pushing up gently into place.
8. Reattach screws on to side of canopy making sure these are tight.
9. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



www.havit.com.au

