


Vanita Wall Light Installation Instructions




Product Specifications

Model No.	HV8101T-BLK	HV8101T-WHT	HV8102T-BLK	HV8102T-WHT	HV8103T-BLK	HV8103T-WHT	HV8104T-BLK	HV8104T-WHT
Name	Vanita							
Material	Aluminium							
Colour	Black	White	Black	White	Black	White	Black	White
Installation Type	Wall - Surface Mounted							
IP Rating	IP54							
Input Voltage	240v AC							
Protection Class	1 (240v Requires Earth) ⚡							
Lamp Base	Built in LED							
Lamp Wattage	1x 20w							
Colour Temp	TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k	
Lumens	1400lm, 1500lm, 1450lm		2100lm, 2500lm, 2450lm		2800lm, 2900lm, 2850lm		3500lm, 3600lm, 3550lm	
CRI	> 80							
Dimmable	Yes - Triac Dimmable							
Warranty	3 Years Replacement*							


HV8101T Dimensions

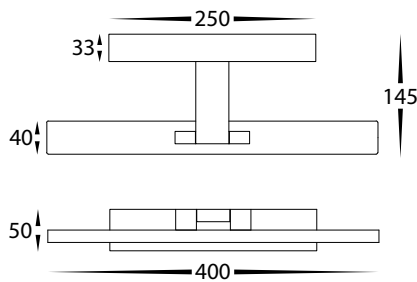


HV8103T Dimensions

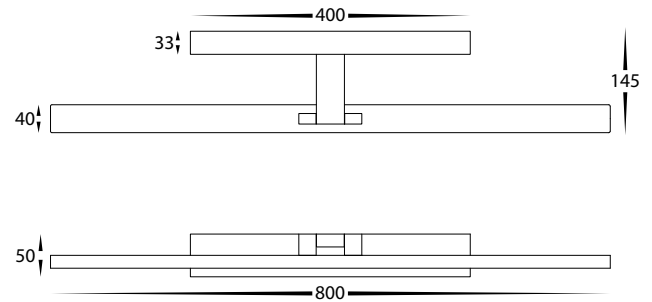

HV8102T Dimensions

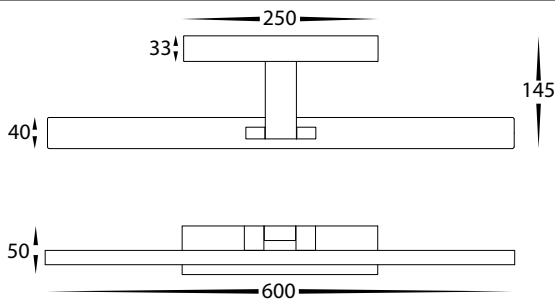

HV8104T Dimensions

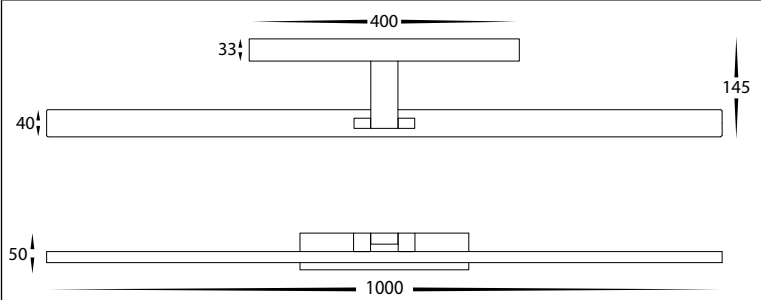

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove Mounting Bracket from fitting by removing screws on side and set aside.
3. Install mounting bracket to wall in desired location using appropriate screws for application
4. Connect the cable - use wire with earth; connect the earth first, then live and neutral wire.
5. Colour temperature is set to 3000K to change slide switch to desired colour temperature located in back of fitting.
6. Reattach fitting to mounting bracket making sure screws are tight.
7. Adjust head gently to desired position if required
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



www.havit.com.au

