

LED Strip Kits



PRODUCT SPECIFICATIONS:

CRI: >80

Input Voltage: 12v DC

Beam Angle: 120 Degrees


Cutting Increments: every 50mm

IP Rating (IP): IP54

Dimmable: Yes (using Havit LED Controllers)

Maximum Continuous Run: 5 metres

Mounting: Must be mounted on heat sink or Aluminium Profile for warranty purposes.

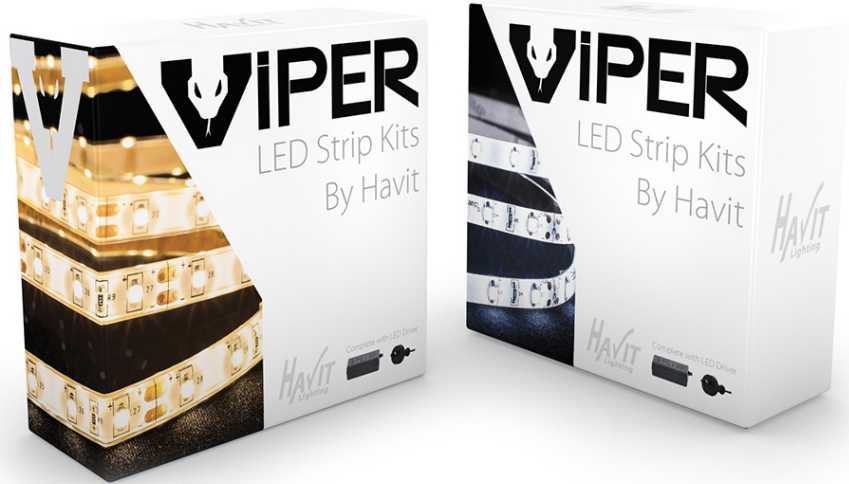

Kit Includes:

- 2m or 5m of LED strip
- 1 x IP20 LED Driver

PART NUMBER	COLOUR TEMP	WATTAGE / METRE	LUMENS / METRE	SIZE (W x H)	LENGTH
VPR9733IP54-60-3K-2M	3000k	4.8w	390lm	8mm x 3mm	2m
VPR9733IP54-60-3K-5M	3000k	4.8w	390lm	8mm x 3mm	5m
VPR9734IP54-60-5K-2M	5500k	4.8w	430lm	8mm x 3mm	2m
VPR9734IP54-60-5K-5M	5500k	4.8w	430lm	8mm x 3mm	5m
VPR9783IP54-60-3K-2M	3000k	14.4w	1200lm	10mm x 3mm	2m
VPR9783IP54-60-3K-5M	3000k	14.4w	1200lm	10mm x 3mm	5m
VPR9784IP54-60-5K-2M	5500k	14.4w	1320lm	10mm x 3mm	2m
VPR9784IP54-60-5K-5M	5500k	14.4w	1320lm	10mm x 3mm	5m

* Lumen output measured at source

** See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS:
143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
web: www.havit.com.au