

MAX-50-REC 1M LED Recessed Profile



Description

The Max-50 Recessed profile is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and Osram Led boards. The system offers many additional options such as Dali dimming and emergency upon request.



Specification Features

Input Voltage:	240V
Power (W):	17.3W/Per Metre
IP rating (IP):	20
Lumens (lm):	Warm White 3000K - 2466lm Neutral White 4000K - 2600lm
LED type:	Osram LED Boards
CCT:	3000K - 4000K
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs
Installation:	Recessed
Material:	Extruded 6063 aluminium
Finish:	Clear anodised, black or white powder coat finish
Diffuser:	Flat high output opal-frost
Length:	Sold per metre*
Size (mm)	Profile (W) 50mm x (H) 75mm
Available Upon Request:	<ul style="list-style-type: none"> High Output LED Boards Intergrated Emergency



Aluminium Finish

White Finish




Back View

Note: This product is made to order and may have a lead time.

* Profile can be cut to any length required.

** Dali and 0-10V dimming available upon request

Diagrams / Additional

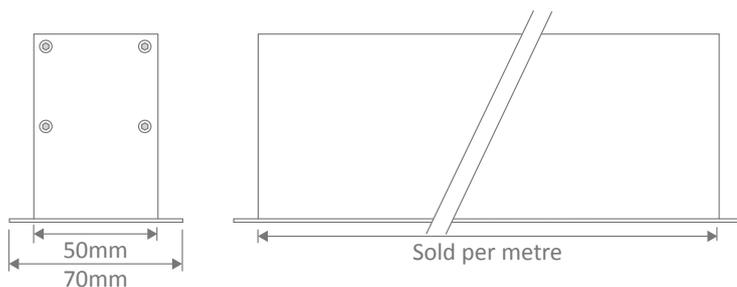

Item No.	Variant			CCT
	Blk	Wht	Alu	
MAX-50-REC	22304	22308	22300	3000K
	22305	22309	22301	4000K
	Dali			
	22554	22558	22550	3000K
	22555	22559	22551	4000K
	22902	22903	22901	Tunable White
	0-10V			
	22556	22560	22552	3000K
	22557	22561	22553	4000K