


Max-50-DN LED Suspended Profile



Description

The Max-50 Down suspension pendant is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and Osram LED boards. The system offers many additional options such as DALI dimming and Emergency function upon request. Available in 1.2M, 1.7M and 2.4M.

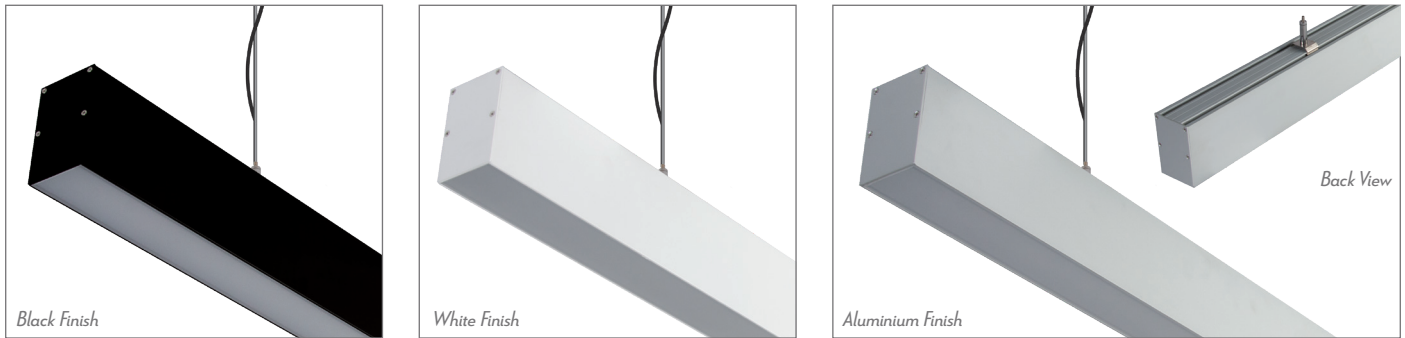


Specification Features

| | 1.2M | 1.7M | 2.4M |
|-------------------------|--|---|---|
| Input Voltage: | | 240V | |
| Power per metre (W): | 20.8W | 31.2W | 41.6W |
| IP rating (IP): | | 20 | |
| Lumens (lm): | Warm White 3000K - 2960lm Neutral White 4000K - 3120lm | Warm White 3000K - 4440lm Neutral White 4000K - 4680lm | Warm White 3000K - 5920lm Neutral White 4000K - 6240lm |
| LED type: | Osram LED Boards | | |
| CCT: | 3000K - 4000K | | |
| CRI: | ≥80 | | |
| Beam angle (°): | 120° | | |
| Dimmable: | No* | | |
| Lifespan (hrs): | 50,000hrs | | |
| Installation: | Suspension mounted | | |
| Material: | Extruded 6063 Aluminium | | |
| Finish: | Clear anodised, black or white powder coat finish | | |
| Diffuser: | Flat high output opal-frost | | |
| Length: | 1.2M | 1.7M | 2.4M |
| Size (mm) | Profile (W) 50mm x (H) 75mm | | |
| Available Upon Request: | <ul style="list-style-type: none"> High Output LED Boards Integrated Emergency | | |

Note: This product is made to order and may have a lead time.

** DALI and 0-10V dimming available upon request*

Diagrams / Additional

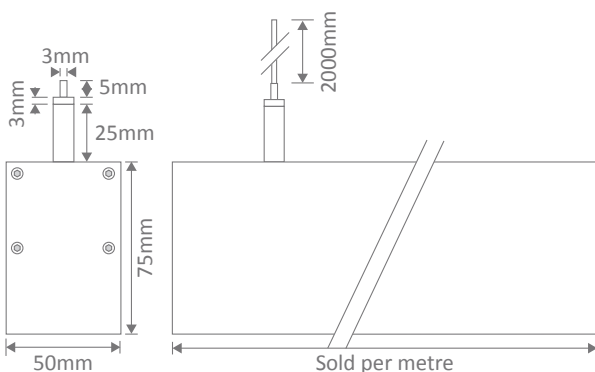

| Item No. | Variants | | | CCT |
|-------------|----------|-------|-------|-------|
| | Blk | Wht | Alu | |
| MAX-50-1.2M | 22469 | 22478 | 22460 | 3000K |
| | 22470 | 22479 | 22461 | 4000K |

| Item No. | Variants | | | CCT |
|-------------|----------|-------|-------|-------|
| | Blk | Wht | Alu | |
| MAX-50-1.7M | 22472 | 22481 | 22463 | 3000K |
| | 22473 | 22482 | 22464 | 4000K |

| Item No. | Variants | | | CCT |
|-------------|----------|-------|-------|-------|
| | Blk | Wht | Alu | |
| MAX-50-2.4M | 22475 | 22484 | 22466 | 3000K |
| | 22476 | 22485 | 22467 | 4000K |