

MODULA RND

Inground Light



Description

The MODULA luminaire provides a practical solution for all inground lighting applications including pathways, driveways, courtyards and decks. Utilising a solid aluminium CNC machined external fascia plate in anodised Titanium finish coupled with a 6063 graded aluminium body in a black anodised finish.

The MODULA recessed inground luminaire utilises the latest in Citizen COB technology offering unsurpassed performance and optical lighting control. A polycarbonate housing is provided for concrete applications. The MODULA is a fantastic addition when used as a source for tree up lighting or external fascia, garden walls.


Specification Features

Input Voltage:	24V DC*
Power (W):	9W
IP rating (IP):	65
Lumens (lm):	Warm White 3000K - 900lm White 5000K - 950lm
LED type:	Citizen COB
CCT:	3000K - 5000K
CRI:	≥83
Beam angle (°):	45°
Dimmable:	No
Lifespan (hrs):	50,000hrs
Cutout (p):	Ø105mm

*Requires 24V DC Constant Voltage LED Driver - Wire in Parallel.



Diagrams / Additional

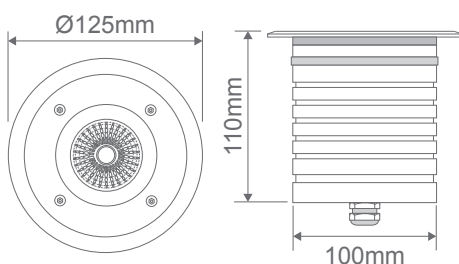

Cutout: Ø110mm

Item No.	Variant	Colour
MODULA-RND	19420	3000K
	19421	5000K