





- Recessed Luminaires LED Downlight
- High efficiency facets aluminium reflectors
- Wide Beam Angle
- Polycarbonate diffuser lens
- Die-cast aluminum mounting ring, with system to fix it to the false ceiling using steel springs
- Die-cast heat sink with passive cooling
- Luminaires are equipped with electronic driver



□ White



Φ 180 mm (Cut out)

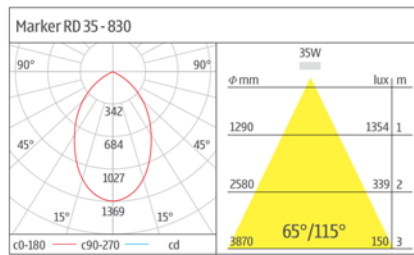

Order No.	Marker RD 35 - 840	Marker RD 35 - 850
Power(W)	35	35
Voltage(V)	220-240	220-240
DC(mA)	700	700
CCT(K)	4000	5000
CRI	75	75
Beam Angle(°)	65/115	65/115
Hot Lumen(Lm)	1930	2110
Power Factor	>0.95	>0.95
Rated Life(°C)	-30~40	-30~40
Weight(Kg)	0.95	0.95
CTN(PCS)	12	12

Driver included : DR35N.700mA+LP