

### NEO-20-SM-TILT


Variants		Item No.	Colour Temp
Blk	Wht		
21296	21297	NEO-20-SM-TILT	TRIO

Thank you for purchasing your new LED NEO-20-SM-TILT, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.


### Specifications

Voltage:	240V	Lumen (±5%):	Warm White 3000K - 1950lm Neutral White 4000K - 2030lm White 5000K - 1920lm	Dimmable:	Yes
Power:	20W	Beam Angle:	60°	Operating Temp:	-20°C~45°C
IP Rating:	IP20	CCT:	3000K - 4000K - 5000K (Switchable)	Power Factor:	0.85
CRI:	≥80	Lifespan:	50,000hrs		


**Step 1:** Take out the fixtures and fitting from the carton.

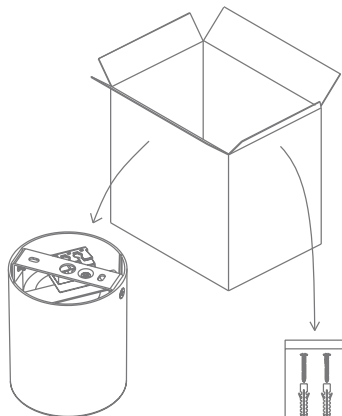


**Step 2:** Loosen the screws on surface mounted frame.

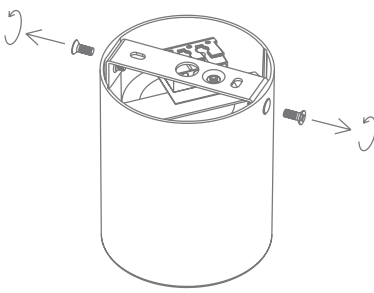


**Step 3:** Hammer the anchors into the ceiling according to the hole distance



**Step 4:** Fix the frame to the ceiling with screws provided.

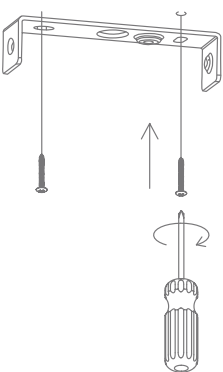


**Step 5:** Fix the "L" "N" "G" into the terminal block.

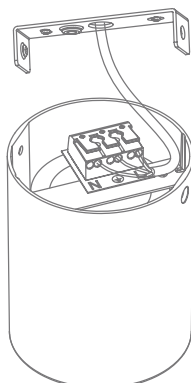

L=BROWN  
 N=BLUE  
 ⊕=YELLOW-GREEN

**Step 6:** Screw back the lamp to the frame according to step 2, adjust the lighting direction.

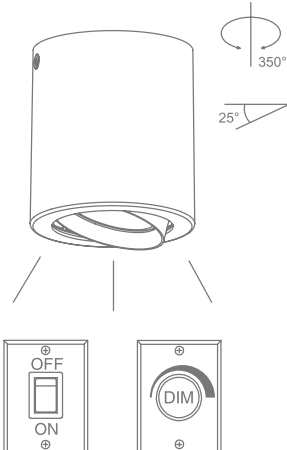

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas