

NEO-PRO-13-SM

Date: 11/2022

| Variants | | Item No. | Colour Temp |
|----------|-------|---------------|-------------|
| Blk | Wht | | |
| 20890 | 20891 | NEO-PRO-13-SM | TRIO |


Thank you for purchasing your new NEO-PRO-13 surface mounted downlight, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

| | | | | | |
|----------|-----------|----------------------|---|------------|-----------|
| Voltage: | 240V | Lumen ($\pm 5\%$): | Warm White 3000K - 1000Lm Neutral White 4000K - 1200Lm White 5700K - 1100Lm | Dimmable: | Yes* |
| Power: | 13W | Beam Angle: | 75° | IP Rating: | 65** |
| CRI: | ≤ 80 | CCT: | 3000K - 4000K - 5700K | Lifespan: | 50,000hrs |

*Fully dimmable with suitable dimmers.

**IP65 from front only.

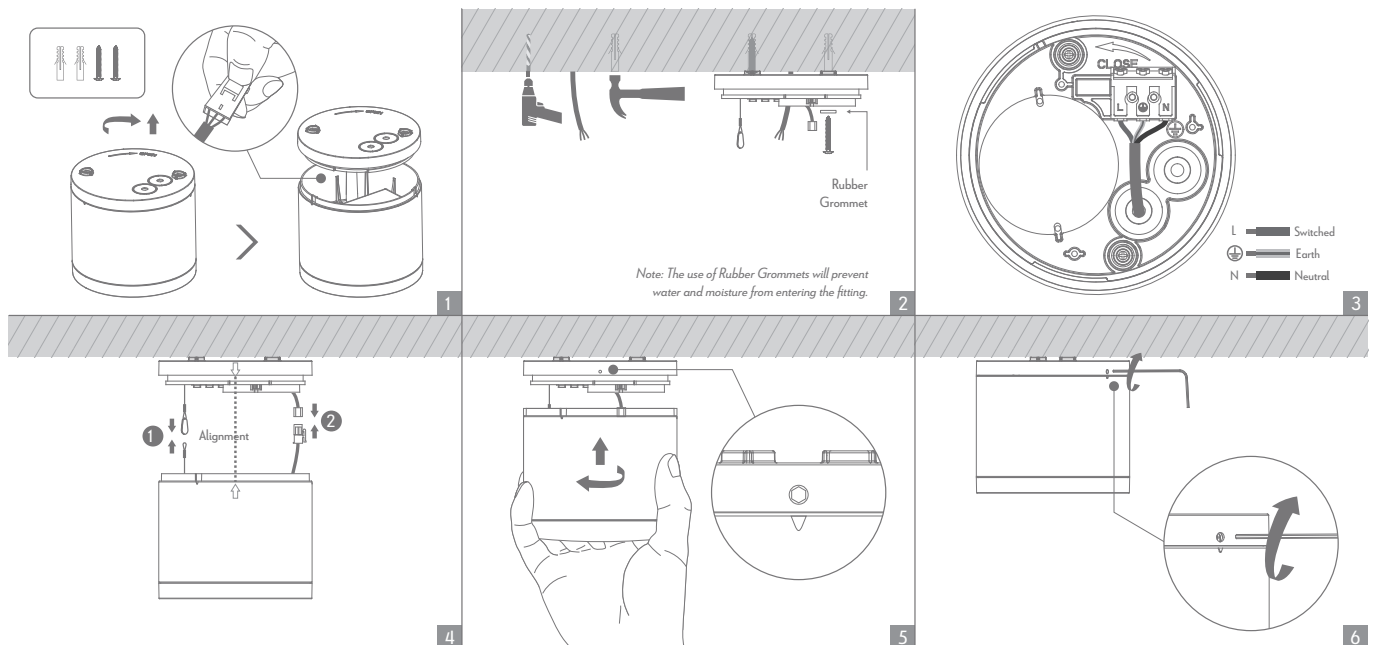

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas