

29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia Phone: 02 9554 9600 | Fax: 02 9554 9433

enquiries@domuslighting.com.au | www.domuslighting.com.au

Installation Manual

NEO-PRO-35-SM

Date: 11/2022


Variants		I. N	
Blk	Wht	Item No.	Colour lemp
20894	20895	NEO-PRO-35-SM	TRIO

Thank you for purchasing your new NEO-PRO-35 surface mounted downlight, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

- Production of							
Voltage:	240V	Lumen (±5%):	Warm White 3000K - 3000Lm Neutral White 4000K - 3200Lm White 5700K - 3100Lm	Dimmable:	Yes*		
Power:	35W	Beam Angle:	75°	IP Rating:	65**		
CRI:	≥80	CCT:	3000K - 4000K - 5700K	Lifespan:	50,000hrs		

^{*}Fully dimmable with suitable dimmers.

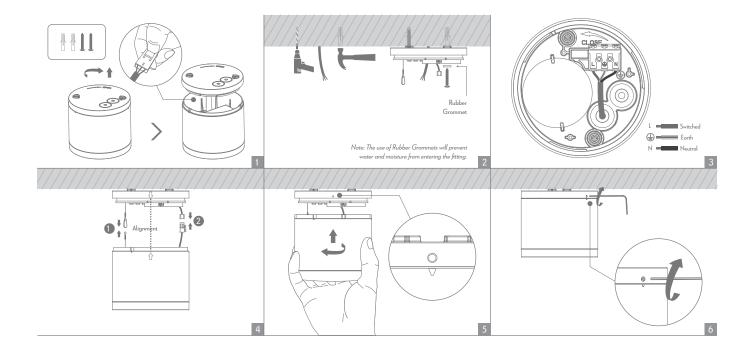

- -The lamp must be installed by professional electrician
- -Ensure the power supply is switched off before fitting this product
- -Do not touch the lamp when in use
- -Keep away from hot steam and corrosive gas

^{**}IP65 from front only.