

Installation Manual

PANEL-303-BLT

Date: 8/2020


Order Code	Product Code	Description
17615	PANEL-303-BLT	10W LED PANEL, white finish - TRIO

Thank you for purchasing your new LED PANEL-303-BLT, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.


Specifications

Voltage:	240V	Lumen (±5%):	WW - 860lm, NW - 1000lm, W - 1100lm	Dimmable:	No
Power:	10W	Lifespan:	40,000hrs	Operating Temp:	-20°C~45°C
IP Rating:	20	CCT:	3000K - 4000K - 5700K (switchable)	Power Factor:	≥0.9
CRI:	≥80				


Recessed into ceiling




1. Remove ceiling plaster tile.



2. Connect power supply.




3. Fix the panel light into the right place.




4. Stabilise the panel.


Suspending




1. Fix the anchor into target place on the ceiling.



2. Fix the installation mount on the ceiling with plastic anchor.




2. Hang the panel to ceiling with suspended installation kits.




3. Adjust the length of steel wire. Connect the power supply.


Surface Mounted




1. Fix the frame onto the ceiling except plaster ceiling.

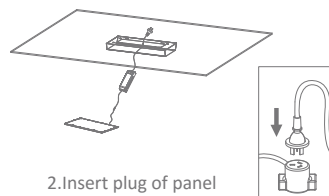


2. Insert plug of panel into mains socket.




3. Slightly tilt and insert the panel into one side of the frame



4. Move the panel into the other side of the frame



5. Insert the plastic plugs into the 4 holes to keep the panel stable.

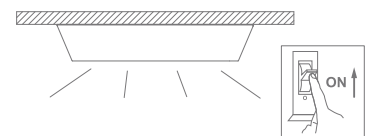

6. Turn on the main power supply

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas