

### PANEL-606-BLT

Date: 8/2020


| Order Code | Product Code  | Description                        |
|------------|---------------|------------------------------------|
| 17621      | PANEL-606-BLT | 36W LED PANEL, white finish - TRIO |

Thank you for purchasing your new LED PANEL-606-BLT, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.


### Specifications

|            |           |                      |                                      |                 |            |
|------------|-----------|----------------------|--------------------------------------|-----------------|------------|
| Voltage:   | 240V      | Lumen ( $\pm 5\%$ ): | WW - 3145lm, NW - 3500lm, W - 3260lm | Dimmable:       | No         |
| Power:     | 36W       | Lifespan:            | 40,000hrs                            | Operating Temp: | -20°C~45°C |
| IP Rating: | 20        | CCT:                 | 3000K - 4000K - 5700K (switchable)   | Power Factor:   | $\geq 0.9$ |
| CRI:       | $\geq 80$ |                      |                                      |                 |            |


### Recessed into ceiling




1. Remove ceiling plaster tile.



2. Connect power supply.




3. Fix the panel light into the right place.




4. Stabilise the panel.


### Suspending




1. Fix the anchor into target place on the ceiling.



2. Fix the installation mount on the ceiling with plastic anchor.




2. Hang the panel to ceiling with suspended installation kits.




3. Adjust the length of steel wire. Connect the power supply.


### Surface Mounted




1. Fix the frame onto the ceiling except plaster ceiling.




2. Insert plug of panel into mains socket.




3. Slightly tilt and insert the panel into one side of the frame



4. Move the panel into the other side of the frame



5. Insert the plastic plugs into the 4 holes to keep the panel stable.

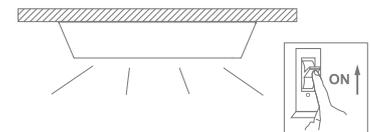

6. Turn on the main power supply

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas