




## Pleo 7.2-S

### Side View Neo Flex LED Strip

#### Description

The PLEO-7.2 series is available in both front-facing and side-view formats, making it ideal for horizontal and vertical illumination applications. Housed in a low-voltage, safe polyurethane enclosure, the range includes mounting clips for quick and easy installation.


Engineered for longer run applications, the PLEO-7.2 allows for up to 20 metres of continuous light from a single driver feed at one end or extend up to 40 metres when powered from both ends. It is available in three colour temperatures, all with a high CRI90 for superior colour rendering. With a high weatherproof rating, this versatile lighting solution from Domus Lighting is designed to perform in a wide range of indoor and outdoor environments. Perfect for illuminating ceiling and floor coves, windows, walls, signage, and more the PLEO-7.2 series offers flexible, high quality lighting for any creative or architectural application.

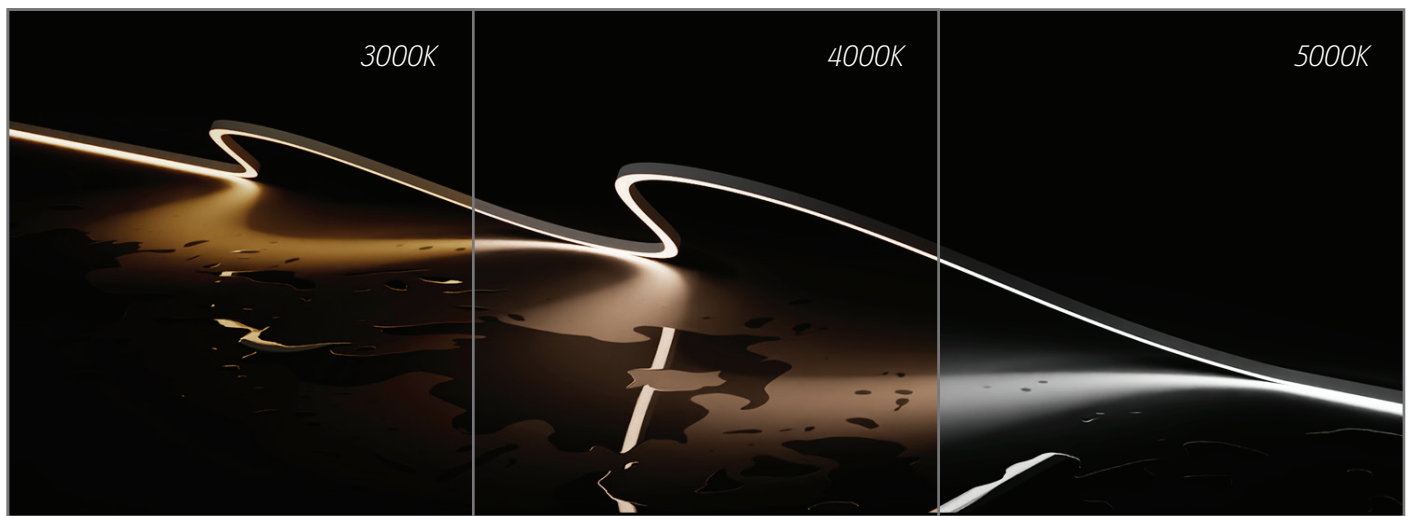

#### Specification Features

|                 |  |
|-----------------|--|
| Input Voltage:  | 24V  |
| Power (W):      | 7.2W   |
| IP rating (IP): | IP67   |
| LED type:       | SMD  |
| CCT:            | 3000K, 4000K & 5000K   |
| LEDs per Metre: | 120  |
| Cutting Length: | 50mm   |
| lm/W:           | 30lm   |
| Continuous Run: | 20m Max (One end driver feed)<br>40m Max (Two end driver feed) |
| Beam angle (°): | 115°   |
| Dimmable:       | Yes  |

#### Diagrams / Additional

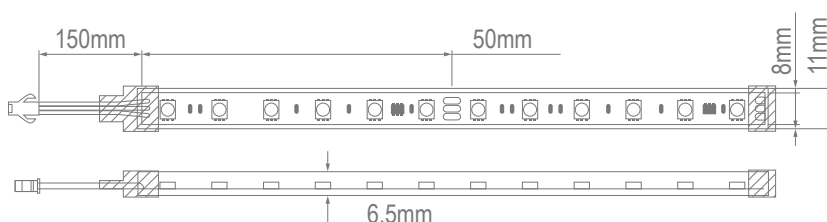

| Item No.   | Variant |       |       |
|------------|---------|-------|-------|
|            | 3000K   | 4000K | 5000K |
| PLEO-7.2-S | 20381   | 20382 | 20383 |