


Pleo Vivid-M-S

Description



Description

The PLEO-VIVID-M-S is a 24V static-colour LED strip designed for outdoor or damp-area installations where consistent colour and environmental durability are essential. Drawing 9.6W per metre and fitted with 140 SMD LEDs per metre, it produces reliable output in Red, Blue, Green, or Yellow. The strip can be trimmed in 50mm increments, allowing it to be cut to length for detailed installations. Its IP67 rating protects against dust and water, making it suitable for exposed locations including facades, signage, and external feature lighting. With a 110° beam angle, the light spreads evenly across surfaces while keeping colour saturation intact. The ability to dim with a suitable driver adds control for projects that need brightness adjustment without changing the overall tone. Designed to run up to 5 metres from a single feed or 10 metres when powered from both ends, the PLEO-VIVID-M-S gives specifiers a reliable way to add bold colour in conditions where standard strips may not hold up

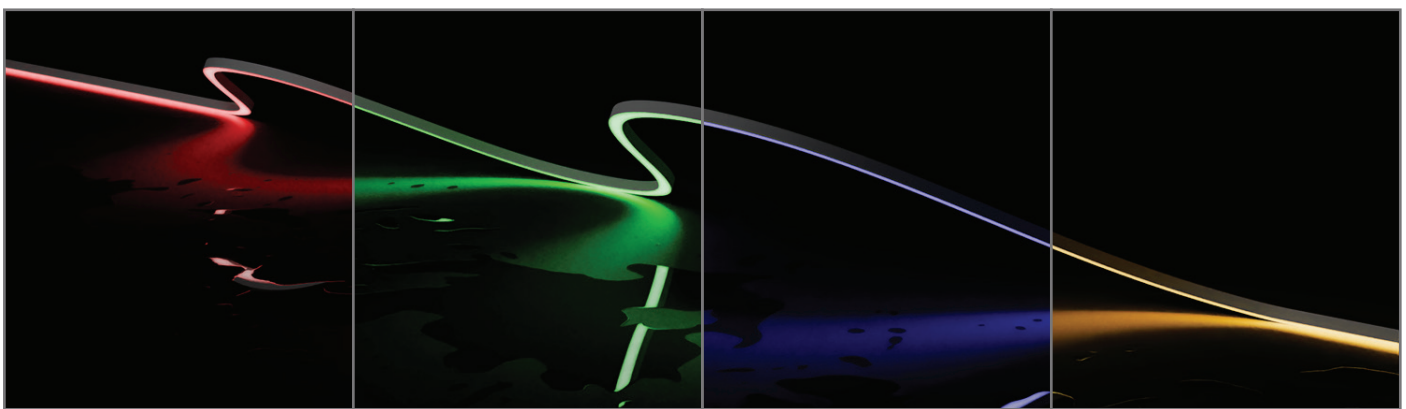

Specification Features

Input Voltage:	24V			
Power (W):	9.6W			
IP rating (IP):	IP67			
LED type:	SMD			
Colour Options:	Red, Blue, Green & Yellow			
LEDs per Metre:	140			
Cutting Length:	50mm			
lm/W:	Red	Blue	Green	Yellow
	10.66lm	6.24lm	19.24lm	18.2lm
Continuous Run:	5m Max (One end driver feed)			
	10m Max (Two end driver feed)			
Beam angle (°):	110°			
Dimmable:	Yes			

Requires a driver

Item No.	Variant			
	Red	Blue	Green	Yellow
PLEO-VIVID-M-S	20073	20074	20075	20076

Diagrams / Additional

