


## Pleo Vivid-S Side View LED Strip light



### Description

The PLEO VIVID-S is a 24V static-colour LED strip designed for compact installations where strong, focused colour is required. With a power draw of 9.6W per metre and a density of 140 SMD LEDs, it delivers consistent output in Red, Green, Blue, or Yellow. Cut points are spaced at 50mm intervals, allowing for precise installation across shorter runs. Rated at IP67, the strip is sealed against dust and moisture, making it suitable for use in both interior and exterior environments. Its 115° beam angle produces defined illumination without excessive spill, making it well suited to tight profiles, signage outlines, and detailed feature lighting. Maximum single-ended runs of up to 5 metres are supported, or up to 10 metres when powered from both ends. Designed for fixed-colour applications, the PLEO VIVID-S provides reliable output in a compact format, backed by a three year warranty.

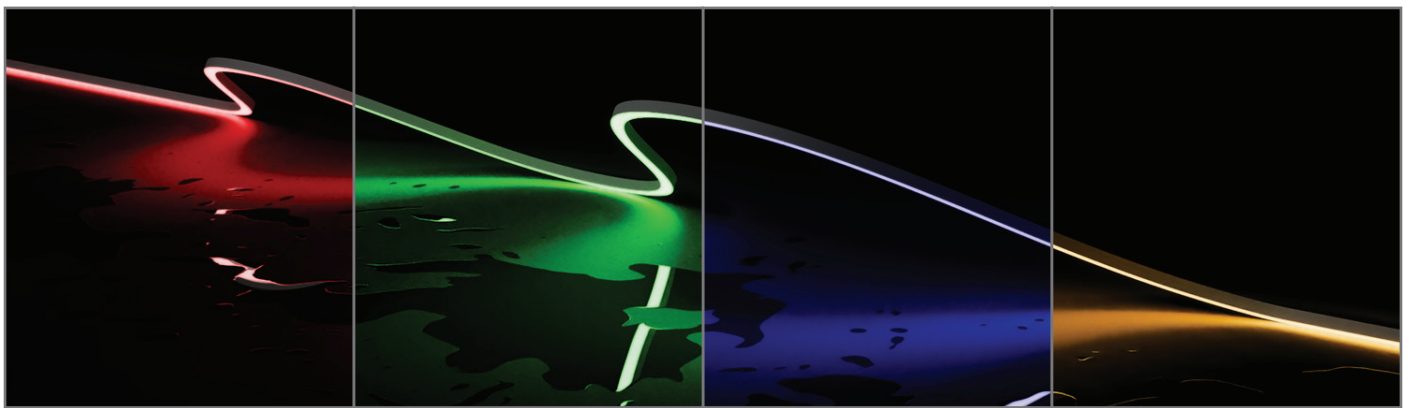

### Specification Features

Input Voltage:	24V			
Power (W):	9.6W			
IP rating (IP):	IP67			
LED type:	SMD			
Colour Options:	Red, Blue, Green & Yellow			
LEDs per Metre:	140			
Cutting Length:	50mm			
lm/W:	Red	Blue	Green	Yellow
	12.3lm	7.2lm	22.2lm	21lm
Continuous Run:	5m Max (One end driver feed)			
	10m Max (Two end driver feed)			
Beam angle (°):	115°			
Dimmable:	Yes			
	<i>Requires a driver</i>			

Item No.	Variant			
	Red	Blue	Green	Yellow
PLEO-VIVID-S	20068	20069	20070	20071

### Diagrams / Additional

