


Proline Pendant Installation Instructions




Product Specifications

	Pendant Models			Extension Models			
Model No.	HCP-692482	HCP-692722	HCP-692962	HCP-602242	HCP-602482	HCP-602722	HCP-602962
Material	Aluminium			Aluminium			
Length	1200mm	1800mm	2400mm	600mm	1200mm	1800mm	2400mm
Colour	Black			Black			
IP Rating	IP20			IP20			
Input Voltage	240v AC			240v AC			
Lamp Base	Built in LED			Built in LED			
Lamp Wattage	1x 48w	1x 72w	1x 96w	1x 24w	1x 48w	1x 72w	1x 96w
Colour Temp	TRI Colour - 3000k, 4000k, 5000k			TRI Colour - 3000k, 4000k, 5000k			
Lumens	3800lm, 4000lm, 4200lm	5700lm, 6000lm, 6300lm	7500lm, 7900lm, 8400lm	1900lm, 2000lm, 2100lm	3800lm, 4000lm, 4200lm	5700lm, 6000lm, 6300lm	7500lm, 7900lm, 8400lm
CRI	> 80			> 80			
Wiring	Parallel			Parallel			
Dimmable	Yes - Triac or 0-1/10v			Yes - Triac or 0-1/10v			
Warranty	5 Years Replacement*			5 Years Replacement*			


HCP-602242 Dimensions




HCP-602482 + HCP-692482 Dimensions

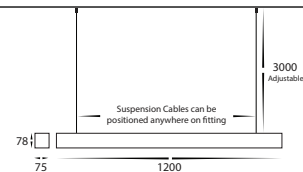

HCP-602722 + HCP-692722 Dimensions

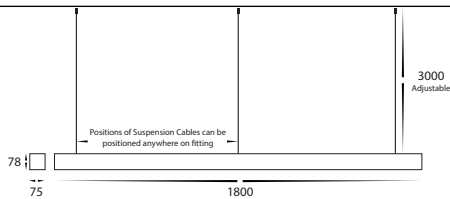

HCP-602962 + HCP-692962 Dimensions

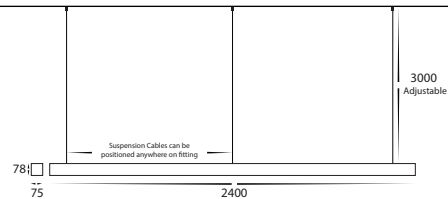

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 2km of any salt water environments.
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove mounting brackets from suspension cables.
3. Install top mounting bracket in desired location using appropriate screws for application.
4. Attach bottom mounting bracket to pendant and tighten.
5. Insert suspension cable into both mounting brackets and adjust cable to desired length.
6. For Pendant models, Remove mounting bracket from canopy and install in desired location
7. Slide mounting bracket over cable.
8. Connect the cable: Use wire with earth, connect earth first then positive and then neutral, If Dimming using 0-1/10v Connect Cables to Dimming Signal.
9. Attach canopy to bracket.
10. Fitting is preset to 3000k, To change, slide switch on top of fitting to desired colour temperature
11. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Steps for Installation for connecting lengths together:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove end caps from pendant and or extension.
3. Insert Joiners into positions on top and inside aluminium profile and tighten allen screws with tools provided
4. Locate Connector cables on the inside of both fittings
5. Connect cables together, If both cables have same connection, Remove internal piece by pulling gently on end to allow for connection.
6. Slide fittings together and tighten allen screws on other fitting.
7. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

8/133 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8383
Email: sales@havitcommercial.com.au
Web: www.havitcommercial.com.au

Warranty Terms & Conditions*



Additional Information

