



## DIM40/12V

Australian approved IP65 dimmable 12V constant voltage LED driver

### Application

Suitable for LED strip, trailing edge dimming models

### Design Specifications

- SELV and EMC compliant
- Safe no load operation, 40 watt, minimum load 5 watt, PF >0.9, output 12V
- Overload and short circuit protection
- 1.2 m flex & 2 pin plug fitted (DIM40W), Output fly leads at secondary end
- Recommended SAL trailing edge dimmers SDD350UM, SDD400U, SDA450U, SDD350BT



### Performance

Dimmable - **YES**  
Dimmer Type - **TRAILING EDGE**


### Technical Specification

Model No.	Input Voltage (V/AC)	Output Voltage (V/DC)	Frequency (Hz)	Power (W)	Power Factor	Dim (mm)
DIM40/12V	240	12	50	40	0.9	155(L) x 43(W) x 26(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

### Dimensions

#### Wiring Diagram

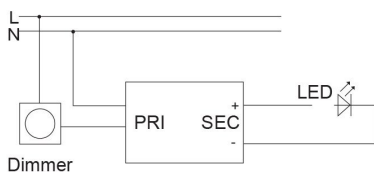

# THE SFI SYSTEM ELIMINATES LED FLICKERING.

**DIMMABLE  
CONTROL WITH  
SFI FLICKER  
CONTROL  
TECHNOLOGY**  
when paired with  
**SAL SFI downlights**



**DIM with  
FLICKER  
CONTROL**

For related  
products  
please  
scan me

