

PANEL S9754HC - 40/50W


40 watt LED High CRI panel UGR<19

Application

Low COI suitable for use in hospitals and medical centres to achieve compliance with AS/NZS 1680.2.5

Design Specifications

- Extruded aluminium profile with high efficiency opal polystyrene back diffuser
- Quality white powder coated finish
- High efficiency SMD LED chips UGR<19, beam distribution 100 degree, CCT selectable 3000,4000,5700K
- Integral constant current non-dimmable LED driver, 40 watt
- Cyanosis Observation Index (COI) compliant with AS/NZS 1680.2.5, High colour rendering with emergency options available
- Dimensions (length a width x height mm) - S9754/312 = 1195 X 295 X 10, S9754/606 = 595 X 595 X 10, S9754/612 = 1195 X 595 X 10

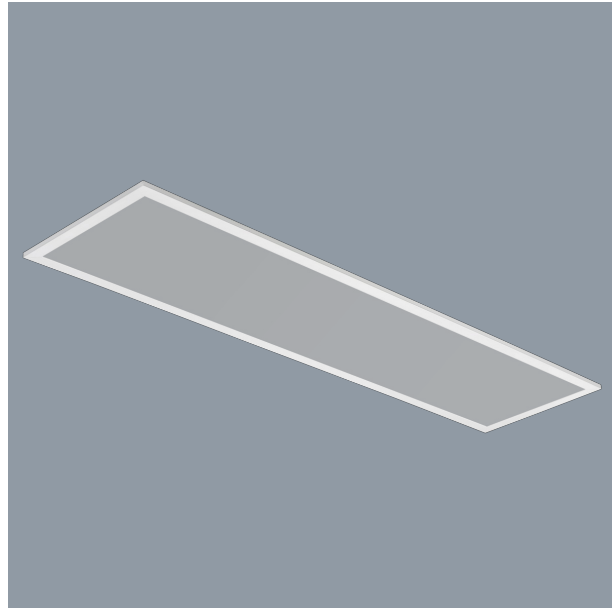

Technical Specification

Model No.	Description	Input (ac) (V)	Power (W)	Lumens (lm)	CCT (K)	Body Colour
S9754HC/312CW	LED PANEL HIGH CRI 295 x 1195mm CW	240	40	2800	4000	WHITE
S9754HC/606CW	LED PANEL HIGH CRI 595 X 595mm CW	240	40	3200	4000	WHITE
S9754HC/612CW	LED PANEL HIGH CRI 595 x 1195mm CW	240	50	4000	4000	WHITE