



## PANEL S9754 MK II

LED panel with selectable colour

### Application


Designed for commercial and office space lighting tasks.

### Design Specifications

- Extruded aluminium profile with high efficiency opal polystyrene rear diffuser, suitable for a range of installation types.
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI > 80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000, 4000, 5700K for TC models
- Emergency models compliant to AS/NZS2293 with D40 spacing classification available. Warranty for EM models 2 years, battery 1 year.

### Performance

Dimmable Driver - **OPTIONAL**

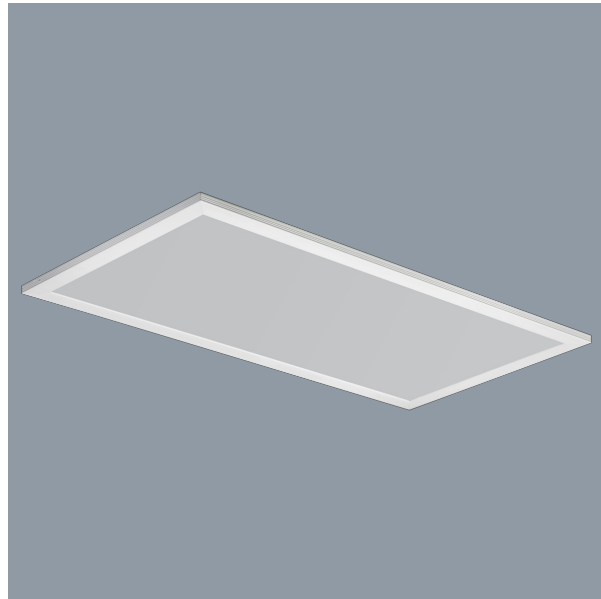

## Technical Specification




Model No.	Description	Input (ac) (V)	Power (W)	Lumens (lm)	CCT (K)
S9754/312 CW	LED PANEL 30W 295 X 1195 X 10mm CW WH	240	30	3100	4000
S9754/312 DL	LED PANEL 30W 295 X 1195 X 10mm DL WH	240	30	3200	6000
S9754/306TC	LED PANEL 18W 295 X 595 X 10mm 3/4/6K	240	18	1800/1900/1900	3000/4000/5700
S9754/606TC	LED PANEL 30W 595 X 595 X 10mm 3/4/6K	240	30	3000/3400/3300	3000/4000/5700
S9754/312TC	LED PANEL 30W 295 X 1195 X 10mm 3/4/6K	240	30	2900/3200/3100	3000/4000/5700
S9754/612TC	LED PANEL 48W 595 X 1195 X 11mm 3/4/6K	240	48	5000/5200/5200	3000/4000/5700
S9754/306EM	LED PANEL 18W 300mm X 600 X 10mm EMERG.	240	18		
S9754/606EM	LED PANEL 30W 600 X 600 X 10 mm EMERG.	240	30		
S9754/312EM	LED PANEL 30W 300 X 1200 X 10mm EMERG	240	30		
S9754/612EM	LED PANEL 48W 600 X 1200 X 10mm EMERG	240	48		

## Photometric Data


### PHOTOMETRIC DATA

Unit: cd C0/C180 — C90/C270 —


S9754/306 @ 4000K



S9754/312 @ 4000K



S9754/606 @ 4000K



S9754/612 @ 4000K

