

S-FIRE SELK1500SF2

SELK1500SF2 S-FIRE LED 4 watt emergency luminaire

Application

A perfect choice for apartments or commercial spaces require compliance to AS/NZS 2293

Design Specifications


- Compliant to AS/NZS2293, with an impressive D63 emergency lighting classification, non-maintained
- Polycarbonate body profile, double insulation, 70mm cut-out and includes a 145mm adaptor ring (130mm cut-out)
- 4 watt system, LED charge status display and test switch, with remote control gear and high performance integral Lithium battery
- 1.2 m flex & 3 pin plug fitted, IC-4 rated (luminaire head only), trim colour white
- Guaranteed 90 minutes emergency function, 16 hour discharge time and intelligent automatic recharge function
- Intelligent automatic recharging function, 16 hour recharge time and deep discharge protection



Technical Specification

Model No.	Description	Input (ac) (V)	Power (W)
SELK1500SF2	S-FIRE INTEGRATED LED EM LIGHT	240	4

Dimensions

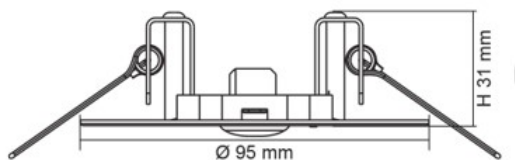

Product Images

