



STARLIGHT SPK2000TC - 24W

2 x 12 watt IP65 LED floodlight, with selectable CCT lamps

Application



A versatile and economical solution for residential exterior spaces

Design Specifications

- Independently adjustable heads
- UV stabilized plastic body
- E27 lamp base
- PAR38 LED lamps included, beam distribution 100 degree, selectable CCT lamp 3000/4000/6000K
- IP65, electrical class II

Performance

- Dimmable - **NO**

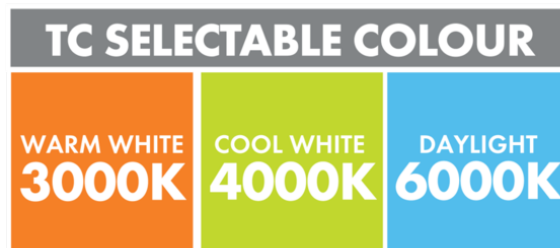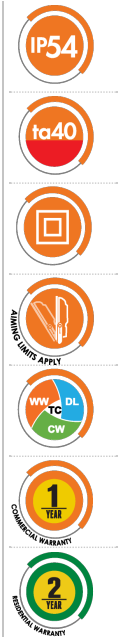

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SPK2000TC/BK	240	24	3000/3400/3000	3000/4000/6000	80
Beam Angle (°)	Body Colour	Dim (mm)				
100	BLACK	221(L) x 310(W) x 112(H) x 190(D)				

* Lumens and Power shown are TOTAL luminaire Lumens (lm) and power (W).

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the

time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

