


Dimension

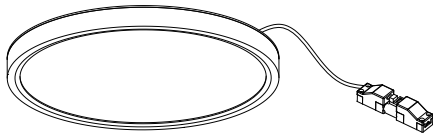

Specification

	SKY OY23.3C3D	SKY OY30.3C3D	SKY OY40.3C3D	SKY OY60.3C3D
Input Voltage	220-240V ~ 50Hz			
Watt	18w	24w	32w	42w
Lumen	2000Lm	2600Lm	3500Lm	4500Lm
CCT	3000K / 4000K / 5000K			
Dimmable	TRIAC			
IP Rating	IP44			
Diameter (mm)	230	300	400	600
Height (mm)	25			

Installation

(The product must be installed by a licensed electrician)

1 Turn mains power OFF

2 Remove installation bracket from the lamp body.

Accessories :

3 Mount the bracket using screws provided (and wall plugs if necessary).

4 Open the junction box. Connect mains wiring to terminal block and refit junction box.

5 Select desired colour temperature via switch .

6 Mount ceiling light into the bracket. Make sure the oyster is locked securely.

6 Turn mains power ON.

Installation must be performed by a qualified Electrical Contractor in accordance of the current wiring standard AS/NZS3000.
3 YEAR REPLACEMENT WARRANTY*
 with Proof of purchase and electrical installation certificate.