

## Installation Manual

Date: 02/2020


## ZAC-4-12V-RND

Variant	Item No.	Description		
19770	ZAC-4-12V-RND-BLK-WW	LED recessed wall light, black finish. 3000K, warm white.		
19771	ZAC-4-12V-RND-BLK-W	LED recessed wall light, black finish. 5000K, white.		
19772	ZAC-4-12V-RND-DGR-WW	LED recessed wall light, dark grey finish. 3000K, warm white.		
19773	ZAC-4-12V-RND-DGR-W	LED recessed wall light, dark grey finish. 5000K, white.		
19774	ZAC-4-12V-RND-SLR-WW	LED recessed wall light, silver finish. 3000K, warm white.		
19775	ZAC-4-12V-RND-SLR-W	LED recessed wall light, silver finish. 5000K, white.		
19776	ZAC-4-12V-RND-WHT-WW	LED recessed wall light, white finish. 3000K, warm white.		
19777	ZAC-4-12V-RND-WHT-W	LED recessed wall light, white finish. 5000K, white.		

Thank you for purchasing your new LED ZAC-4-12V-RND, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

## **Specifications**

Voltage:	12V DC	Lumen (±5%):	Warm White 3000K - 200lm White 5000K - 250lm	Dimmable:	No
Power:	4W	Beam Angle:	30°	Operating Temp:	-20°~45°
IP Rating:	IP65	CCT:	3000К - 5000К	Requires:	12V DC Constant
CRI:	≥80	Lifespan:	50,000hrs	-	Voltage LED Driver

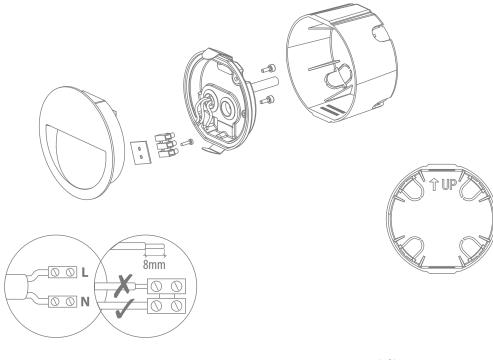

Cutout without recessed box: (Ø) 100mm Cutout with recessed box: (Ø) 110mm

Note: The fitting must be wired in parallrel