


FEATURES

1. Die casting aluminum shell, interactive struction
2. great improve the heat dissipation
3. Ultra thin design, thickness for 10W is 25mm only
4. Unique space for sticker, more reasonable
5. The bracket with adjustable gear convention for adjust angle(100-500W)





Model	LG198
Voltage	AC220-240V 50/60Hz
LED	SMD 2835
Lifespan	>50,000Hrs
Dimension	260*58*335/300*69*414mm
Warranty	5 years
Carton	2pcs/CTN(100W) / 1pcs/CTN(200W)
Carton Size	L43*W29*H15CM(100W) / L38*W31*H9CM(200W)
Weight	N.W: 6.9KG G.W: 8.5KG (100W) N.W: 5KG G.W: 5KG (200W)

5700K(100W)

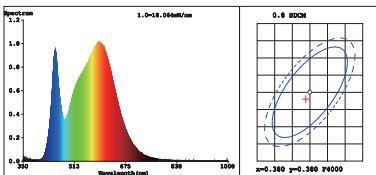

5700K(200W)

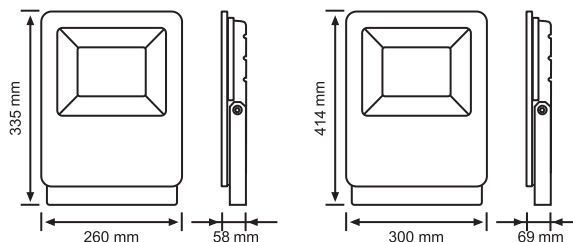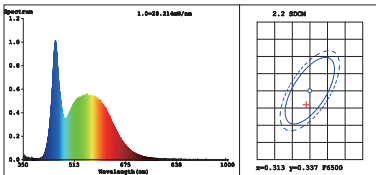

SPECIFICATION

Power	Model	Fitting Color	CRI	Base	CCT	FLUX	Dimmable
100W/200W	LG198	Black	>80		5700K	10000lm/20000lm	no