



FLAT SL2110 - 5/30W


Dimmable low profile ceiling luminaires

Application

A creative design for residential or commercial spaces, with a selection of 5, 12, 18 or 30 watt models

Design Specifications

- Seamless surface mounting base
- Robust polycarbonate diffuser, luminaire colour white
- Simple twist lock installation mechanism for the surface mount model.
Pendant includes surface mount cap and three (3) x 1.5M adjustable stainless cables
- Integral constant current trailing edge dimmable LED driver
- CCT 4000K as standard, optional 3000K or 6000K

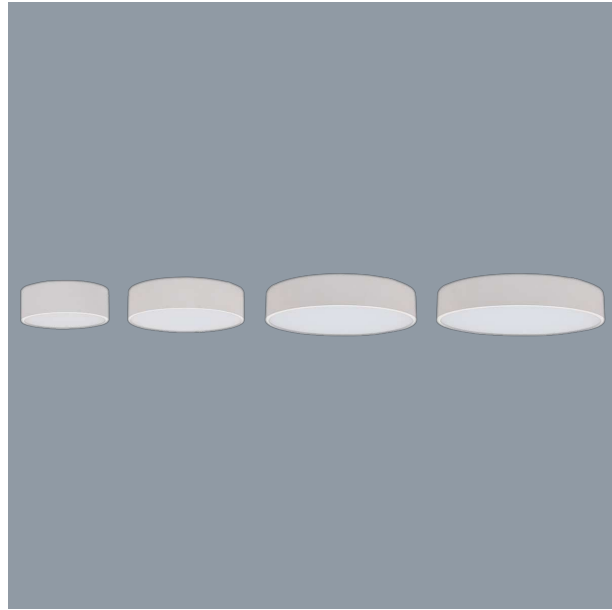

-
-
-
-
-
-

Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**

Technical Specification

| Product | Model No. | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K) | CRI |
|---------|-------------|----------------------|-----------|-------------|---------|-----|
| | SL2110/20CW | 240 | 12 | 780 | 4000 | 80 |

| Dimmable | Dim (mm) | Body Colour |
|----------|----------------|-------------|
| YES | 160(W) x 50(H) | WHITE |


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Photometric Data

Unit: cd C0/C180 — C90/C270

SL2110/10CW at 4000K



SL2110/50CW at 4000K





PIXIE AMBIENCE, CHANGE YOUR COLOUR TO MATCH YOUR STYLE.

The innovative PIXIE AMBIENCE SWITCH PLATES have been designed with the end user and installer in mind, allowing you to change the colour face plate as fashion demands.

For more
information
please
scan me

