


## SERDA LINEAR PENDANT LIGHT

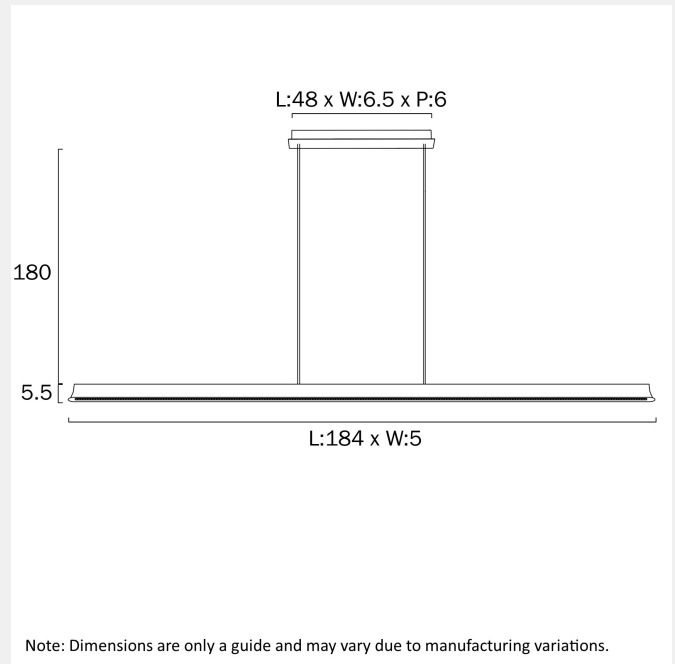

Note: Dimensions are only a guide and may vary due to manufacturing variations.

### LIGHT SOURCE

**Voltage Input**

240V

**Total Wattage (max)**

46

**Globe Type**

LED integrated SMD

**Globe / Light Source qty**

0

**Globe / Light Source included**

Yes

**Color Kelvin**

3 CCT (2700k - 4000k - 5000k)

**Color Temperature**

Warm White; Natural White; Cool White

**Dimmable**

Touch

**Lumens**

2310

**CRI (Color Rendering Index)**

>83

**Surge Protection (Yes/No)**

0

### SPECIFICATIONS

**Lead and Plug**

0

**IP rating**

IP20

**Suspension Type**

0

**Height Adjustable?**

Yes

**Raked Ceiling Compatible**

0

**Mounting**

0

**Electrical Protection**

CLASS I - HIGH VOLTAGE, EARTH REQUIRED

**Control Gear Included**

0

## COLOUR AND MATERIAL

---

**Fixture Material**

Aluminium, Iron, PVC

**Fixture Pantone Color**

0

**Glass Color**

0

**Diffuser Material**

0

## WARRANTY

---

**Replacement Warranty**

\*3 Years

## PRODUCT DIMENSIONS

---

**Fixture Weight (Kg)**

3.3

**Fixture Height (cm)**

5.5

**Fixture Length (cm)**

184

**Fixture Width (cm)**

5

**Suspension Length (cm)**

180

## OTHER

---

**Additional Functions**

0

## CARE

---

**Care Instructions**

Do not use strong liquid cleaners. Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidise and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

## VARIANTS

---

[SERDA PE184-WH] SERDA  
LINEAR PENDANT LIGHT



9329501083437

Find SERDA LINEAR PENDANT LIGHT on  
[www.telbix.com](http://www.telbix.com)

