

# Licht Wall Light Installation Instructions




## Product Specifications

|                   |                                                                                                           |
|-------------------|-----------------------------------------------------------------------------------------------------------|
| Model No.         | HV3672W-BLK                                                                                               |
| Name              | Licht                                                                                                     |
| Material          | Aluminium Body + Glass Cover                                                                              |
| Colour            | Black                                                                                                     |
| IP Rating         | IP44                                                                                                      |
| Installation Type | Wall - Surface Mounted                                                                                    |
| Protection Class  | 1 (240v Requires Earth)  |
| Input Voltage     | 240v AC                                                                                                   |
| Lamp Base         | E27                                                                                                       |
| Lamp Wattage      | 1 x 9w                                                                                                    |
| Colour Temp       | 2700k                                                                                                     |
| Lumens            | 700lm                                                                                                     |
| CRI               | > 80                                                                                                      |
| Dimmable          | Yes - Triac                                                                                               |
| Warranty          | 3 Years Replacement*                                                                                      |


## Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

## Dimensions

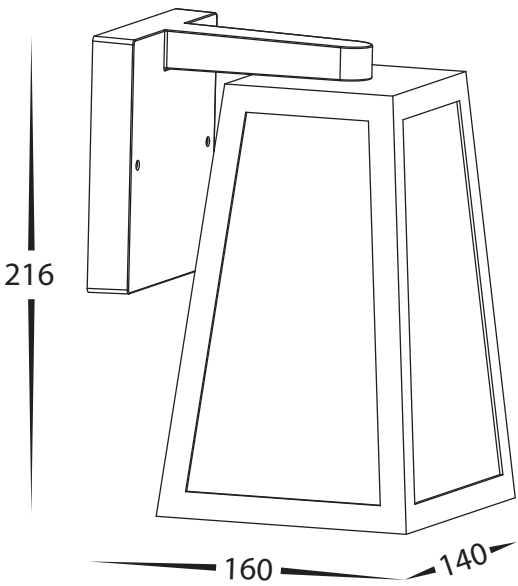

## Mounting Base Dimensions

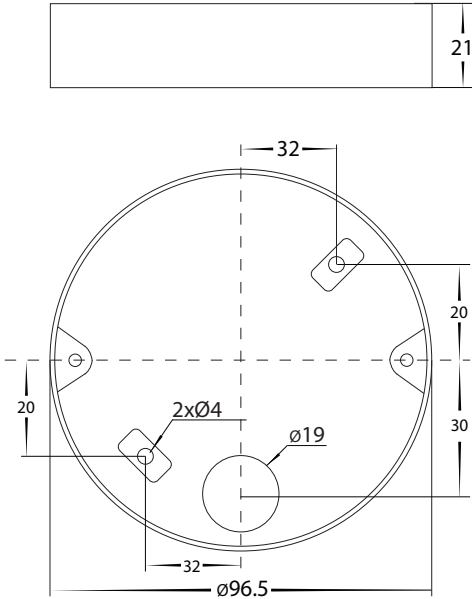

## Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove screws from front of fitting and set aside.
3. Remove base plate from fitting.
4. Slide cable through cable gland and place base plate against wall
5. Attach base plate to wall using appropriate screws for application.
6. Seal all holes including cable entry and around screws.
7. Connect the cable - use wire with earth; connect the earth first, then live and neutral wire.
8. Reattach fitting to base plate making sure seals are still in place
9. Reattach nuts onto threads on from of fitting and tighten making sure these are tight enough to avoid any water penetration.
10. Apply silicon around edge of base to prevent any water from getting inside to electrical connections.
11. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Steps for Changing globe:

1. Make sure that the electrical circuit is free of voltage (master switch off).
2. Remove cover from fitting by removing screws on bottom of fitting and set aside.
3. Remove globe by twisting anti clockwise
4. Re-insert the appropriate globe by twisting clockwise into the lamp holder (Make sure not to exceed max wattage, see product label for correct info)
5. Reattach cover by inserting screws and tightening making sure the seals are still in place and cover is tight to avoid any water penetration.

**Must be installed by a licensed electrician**

## Contact Details:

143 Beauchamp Road  
Matraville NSW 2036  
Australia  
Tel: 02 9381 8300  
Fax: 02 9666 8881  
Email: [sales@havit.com.au](mailto:sales@havit.com.au)  
Web: [www.havit.com.au](http://www.havit.com.au)

## Warranty Terms & Conditions\*



[www.havit.com.au](http://www.havit.com.au)

