


# Single Circuit Track Installation Instructions




## Product Specifications

Model No.	HCP-102110	HCP-102120	HCP-102130	HCP-103110	HCP-103120	HCP-103130
Material	Aluminium + Plastic			Aluminium + Plastic		
Colour	Black			White		
Length	1m	2m	3m	1m	2m	3m
IP Rating	IP20			IP20		
Track Type	Single Circuit - Surface Mounted			Single Circuit - Surface Mounted		
Input Voltage	240v			240v		
Protection Class	1 (Requires Earth) ⚡			1 (Requires Earth) ⚡		
Max Load	8A			8A		
Warranty	5 Years Replacement*			5 Years Replacement*		


## Connection Wiring Diagram

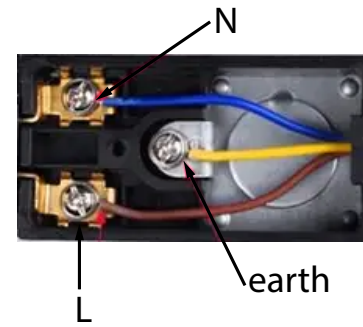

## Sample Installation Diagram

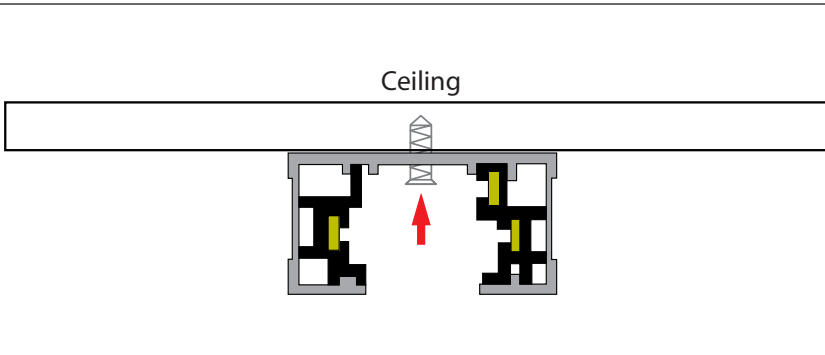

## Dimensions

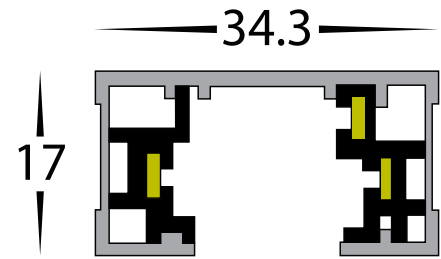

## Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

## Steps for Surface Mounted Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove cover from live end and set aside
3. Insert Cables into live end and screw track into place using appropriate screws for application.
4. Connect earth cable first then Live and Neutral cables
5. Reattach cover to Live end
6. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

## Steps for Track Head Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Slide locking pin on base to open position
3. Insert track light into track making sure connection points are on correct side of track
4. Slide locking pin into closed position
5. Direct light fitting to desired position by twisting left and right or up and down making sure not to twist too far to avoid damaging fitting.
6. Repeat these steps if more than 1 fitting is being installed
7. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

**Must be installed by a licensed electrician**

## Contact Details:

8/133 Beauchamp Road Tel: 02 9381 8383  
 Matraville NSW 2036 Email: sales@havitcommercial.com.au  
 Australia Web: www.havitcommercial.com.au

## Warranty Terms & Conditions\*



[www.havitcommercial.com.au](http://www.havitcommercial.com.au)

