



## AFFINITY SE7360TC - 15W

Dimmable, 15 watt LED circular profile, IP65 wall mount with selectable CCT

### Application


Residential or commercial feature walkways and facades

### Design Specifications

- Stylish, indirect optical design
- Durable aluminium circular profile, PC base, choice of white or black
- IP65 for interior or exterior use
- Integral flickerCONTROLLED LED control gear
- Selectable CCT, CRI>80
- IK06

### Performance

- Dimmable - **YES**
- Dimmer Type - **trailing edge**

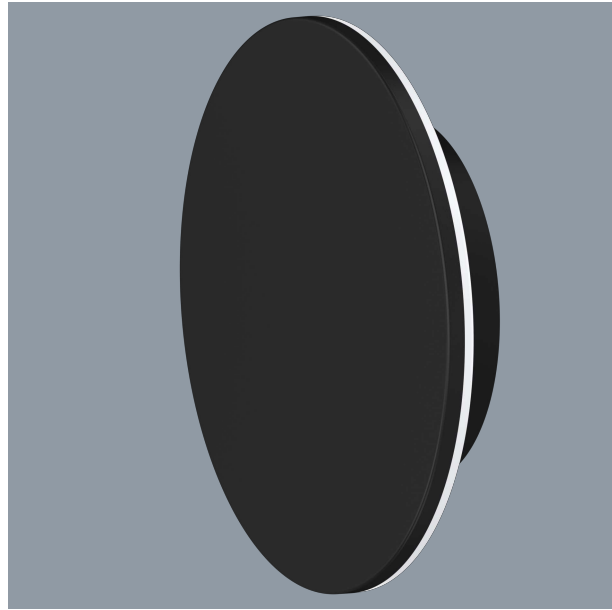

### Technical Specification


| Product | Model No.   | Input Voltage (V/AC) | Power (W) | Lumens (lm)    | CCT (K)        | CRI |
|---------|-------------|----------------------|-----------|----------------|----------------|-----|
|         | SE7360TC/BK | 240                  | 15        | 1100/1200/1150 | 3000/4000/5700 | 80  |
|         | SE7360TC/WH | 240                  | 15        | 1100/1200/1150 | 3000/4000/5700 | 80  |

| Beam Angle (°) | Dimmable | Dim (mm) | Diameter (mm) | Body Colour |
|----------------|----------|----------|---------------|-------------|
| 90             | YES      | 50(H)    | 250           | BLACK       |
| 90             | YES      | 50(H)    | 250           | WHITE       |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



## Dimensions

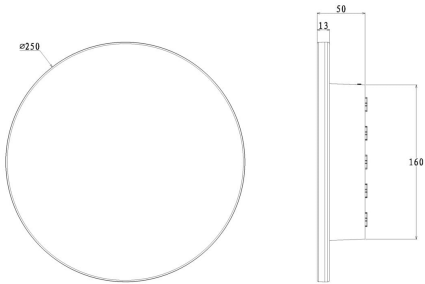



# PIXIE AMBIENCE, CHANGE YOUR COLOUR TO MATCH YOUR STYLE.

The innovative PIXIE AMBIENCE SWITCH PLATES have been designed with the end user and installer in mind, allowing you to change the colour face plate as fashion demands.

For more  
information  
please  
scan me

